
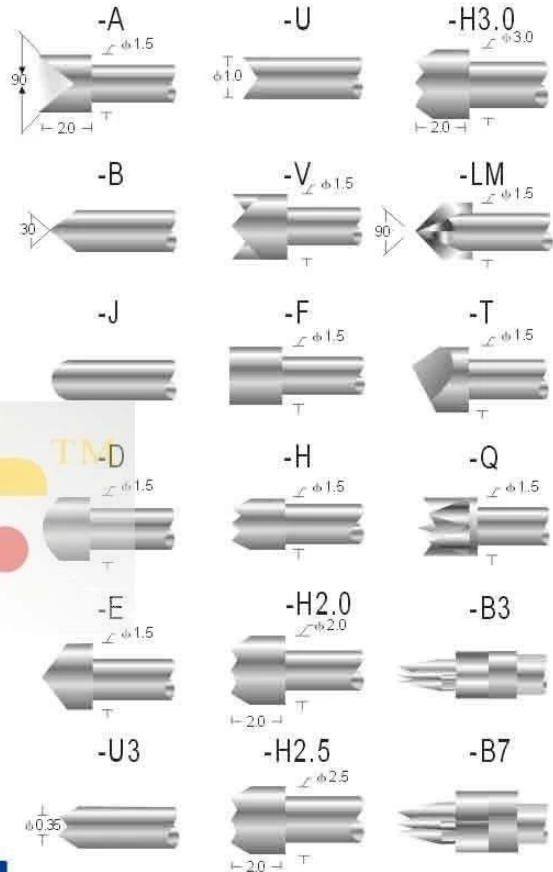


□□□□

□□	SFENG
□□□□	SF-P100
□□	□□
□□	□□
□□	SUS□□□□
□□	200□
□□□□	6.40□0.2520"□
□□	3A
□□	50mW
□□□□	2.54□0.1000"□
□□□□□	1.70□0.0670"□/ 1.75□0.0689"□
MOQ	100 □
□□□□	□□□□7□□□□

□□□□

# SF-P100

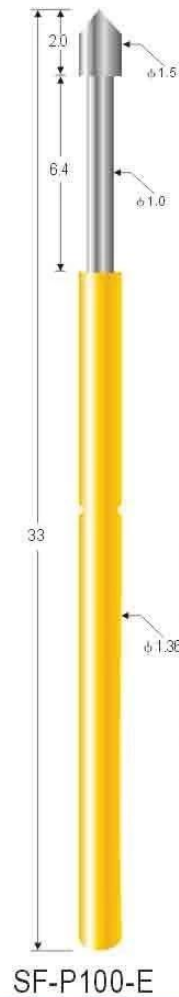

## Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000")
- Mounting hole size(钻孔尺寸):  
压克力: 1.70mm(.0670")  
电木板、玻璃纤维板: 1.75mm(.0689")
- Full travel(行程): 6.40(.2520")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated; SK4, Rh plated  
Barrel: Brass, Gold plated  
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

[www.shengfengdz.com](http://www.shengfengdz.com)



chinapogopinsupplier.com

### 公司简介

1. 专业生产 24 针探针
2. 专业生产 OEM 探针
3. 专业生产各种规格探针
4. 专业生产各种规格探针

### 产品

专业生产 PCB、ICT、FCT 探针；  
专业生产各种规格探针；  
专业生产 BGA 探针；







□□□□□□□□□□LM□□QZ□VZ□□;

□□□□□□□□□□□□□□;

□□□□□;□□/□□;

□□□□□□□□□□30□OK□□□□□□□□POM□□□□□□

□□□□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

