


□□□□

□□	SFENG
□□□□	SF-P50
□□	□□
□□	□□
□□	SUS□□□□
□□	100□
□□□□	2.5□0.0984"□
□□	1.5A
□□	50mW
□□□□	1.27□0.0500"0
□□□□□	0.90□0.0354"□/ 0.95□0.0374"□
MOQ	100 □
□□□□	□□□□□7□□□□


□□□□

SF-P50

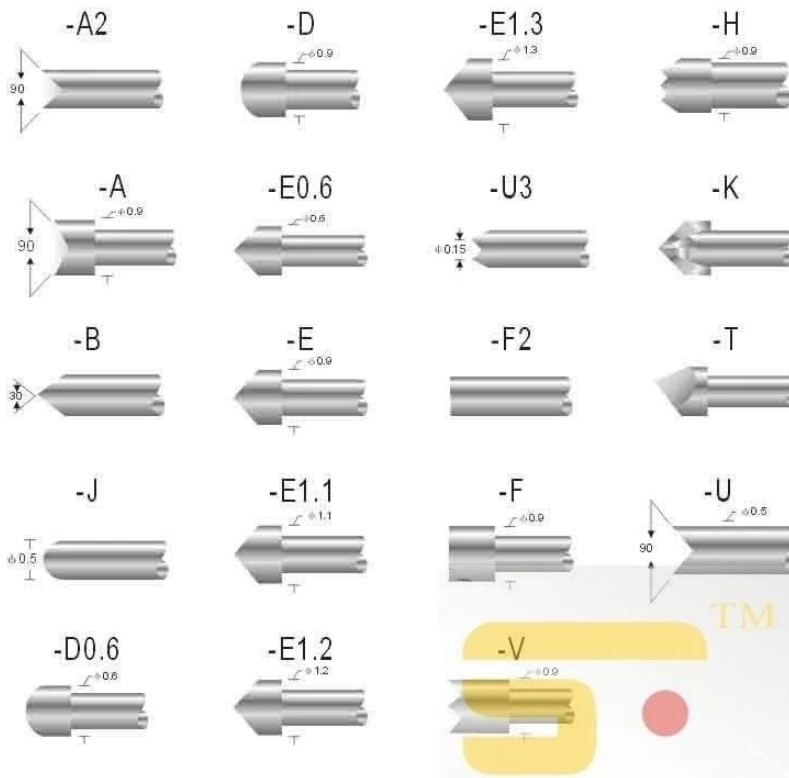

Probe specifications SF-P50(技术规格)

- Recommended minimum center(最小间距):
1.27mm(.0500 ")
- Mounting hole size(钻孔尺寸):
V: 0.90mm(.0354 ")
W: 0.95mm(.0374 ")
- Full travel(行程): 2.5(.0984 ")
- Spring force(弹簧压力): 100g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Phosphor bronze, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 1.5A(安培)
- Contact resistance(接触电阻): 50m Ω (毫欧姆)

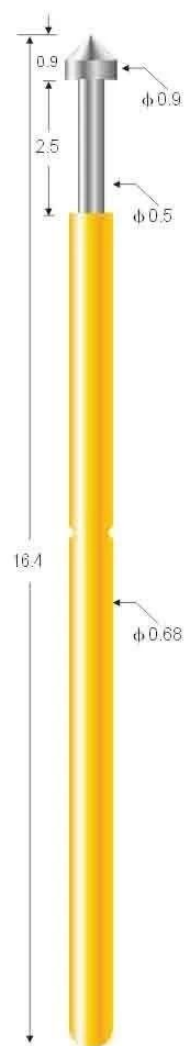



chinapogopinsupplier.com

公司简介

1. 专业生产 24 针探针
2. 提供 OEM 服务
3. 产品广泛应用于 PCB、ICT、FCT 等领域
4. 拥有完善的质量管理体系

产品

专业生产 PCB、ICT、FCT 探针；
产品广泛应用于 PCB、ICT、FCT 等领域；

□□□□BGA□□□□□□;







□□□□□□□□□□LM□□QZ□VZ□□;

□□□□□□□□□□□□□□;

□□□□□;□□/□□;

□□□□□□□□□□30□OK□□□□□□□□POM□□□□□□

□□□□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

