

□□□□

□□	SFENG
□□	SF-P030
□□	□□□□□□□□□□
□□	□□□□□□□□
□□	SK4□□□□□
□□	60□
□□□□	2.0□□
□□	1A
□□	150mΩ
□□	1.0□□
□□□□□	0.75□□
MOQ	100 □
□□□□	7 □□□□□□□□

□□□□

胜峰探针  
**SFENG**  
The China's The World's

RoHS

QUALITY ASSURED FIRM  
ISO 9001  
SGS

CE


chinapogopinsupplier.com

## Probe specifications SF-P030 PL030(技术规格)

- Recommended minimum center(最小间距): 0.90mm(.0354 ")
- Mounting hole size(钻孔尺寸): 0.65mm(.0256 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 60g(克)
- Materials and finishes(材料及涂饰):  
Plunger:SK4,Rh plated  
Barrel:Phosphor bronze,Gold plated  
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 150mΩ(毫欧姆)

### Receptacle specifications

Materials and finishes: Phosphor bronze,  
Gold plated

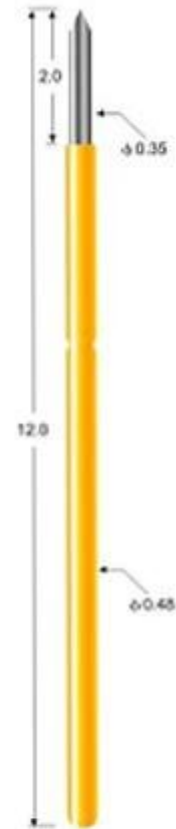

SF-P030-B

□□□□□

1. □24□□□□□□□□□□□□

2. □□□□□□□□□□OEM

3. □□□□□□□□□□□□□□□□

4. □□□□□□□□□□□□□□□□

□□□□

---□□PCB,ICT,FCT□□



