

□□□□

□□	SFENG
□□	SF-P020-U
□□	□□□□□□□□□□
□□	□□□□□□□□
□□	SK4□□□□□
□□	80□
□□□□	2.0□□
□□	1A
□□	120MΩ
□□□□	1.0□□
□□□□□	0.75□□
MOQ	100 □
□□□□	7 □□□□□□□□

□□□□


胜峰探针
SFENG
The China's The World's

RoHS

QUALITY ASSURED FIRM
ISO 9001
SGS

CE

chinapogopinsupplier.com

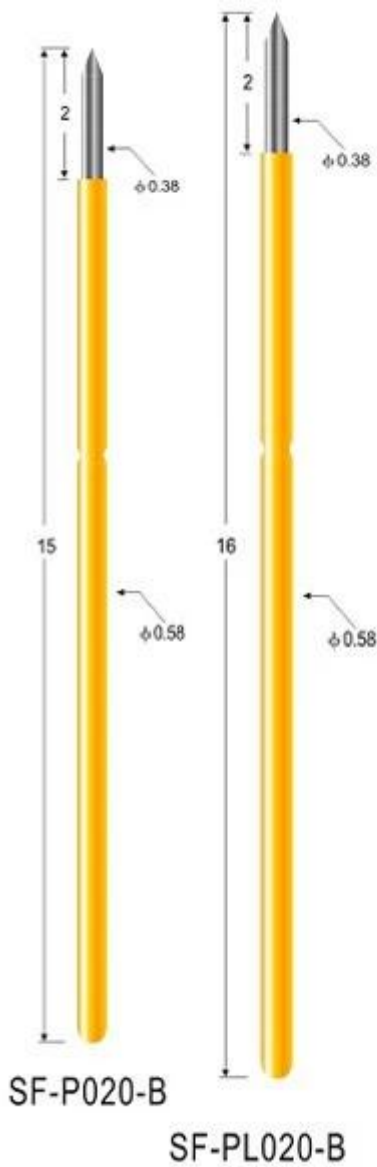

Probe specifications SF-P020 PL020 (插)

- Recommended minimum center(最小间距): 1.0mm(.0394 ")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,
Gold plated

□□□□□

1. □24□□□□□□□□□□□□□□

2. □□□□□□□□□□OEM

3. □□□□□□□□□□□□□□□□□□

4. □□□□□□□□□□□□□□□□□□

□□□□

--□□PCB,ICT,FCT□□

---□□□□□□□□□□□□□□□□□□□□pogo pin

---BGA& ;







---LM ;

---...

---:/;

---O 30OKwirePOM

□□□□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

