

## Federbelastete 100-mil-Sonde für PCB-Test

### Material und Oberflächen

Kolben: Bronze oder Messing oder BeCu, vergoldet oder vernickelt;

Fass: Messing, vergoldet oder vernickelt;

Frühling: Edelstahl oder Musikdraht;

### Bilder

- Irgendwelche Tipps könnten wir für Sie bereitstellen
- Wenn Sie daran interessiert sind, kontaktieren Sie mich bitte




## SF-P100




SF-P100-E

### Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(1000")
- Mounting hole size(钻孔尺寸): 压克力: 1.70mm(.0670")  
电木板、玻璃纤维板: 1.75mm(.0689")
- Full travel(行程): 6.40(2520")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated; SK4, Rh plated  
Barrel: Brass, Gold plated  
Spring: Stainless steel
- Current rating(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

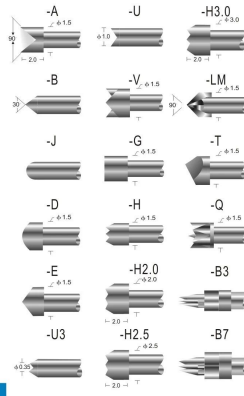

## SF-R100

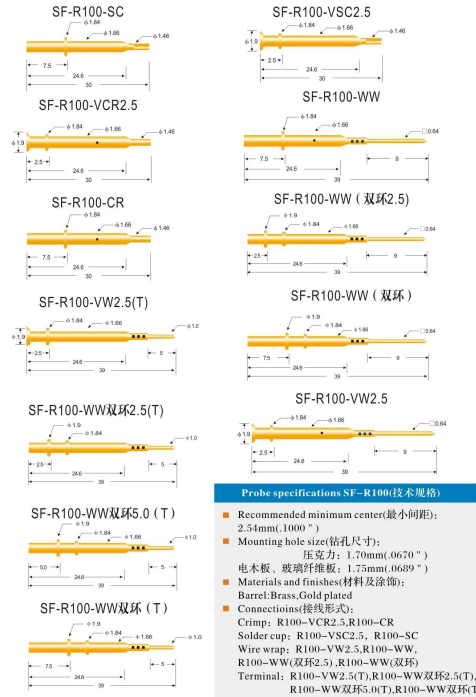

### Probe specifications SF-R100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(1000")
- Mounting hole size(钻孔尺寸): 压克力: 1.70mm(.0670")  
电木板、玻璃纤维板: 1.75mm(.0689")
- Materials and finishes(材料及涂饰):  
Barrel: Brass, Gold plated
- Connections(接线形式):  
Crimp: R100-VCR2.5, R100-CR  
Solder cup: R100-VSC2.5, R100-SC  
Wire wrap: R100-VW2.5, R100-WW, R100-WW(双环2.5), R100-WW(双环)
- Terminal: R100-VW2.5(T), R100-WW双环2.5(T), R100-WW双环5.0(T), R100-WW双环(T)







## Unsere Vorteile

1. wir haben 30 jahre erfahrung in sonde pin und haben uns selbst fabrik.
2. wir bieten kostenlose probe und haben eine testabteilung.
3. Wir könnten Produkte als Ihre Anfrage herstellen.
4. wir garantieren besten Preis und guten Service.

## Unser Hauptprodukt

Spring loaded pin (single) for PCB, ICT, FCT testing etc;  
Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;  
Double ended probe for BGA and Semiconductor testing;  
Universal pin without spring, coating pin, LM pin with QZ and VZ series;  
High current probe, Switch probe, Capacitance needle;  
Terminal & receptacle /socket;  
Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

## Kontrolle der Testausrüstung

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Paket

