


## Micron Schaltsonde für PCB-Tests

### Spezifikation:

Brand	SFENG
Item number	SF-SW2.96*49MM
Plunger	Brass
Barrel	Brass
Spring	SUS
Spring Force	100g@1.5mm
MOQ	100 pcs
Lead time	Within 2 working days after receiving the payment
Payment	T/T, Western union, Paypal or others.

### Bild:

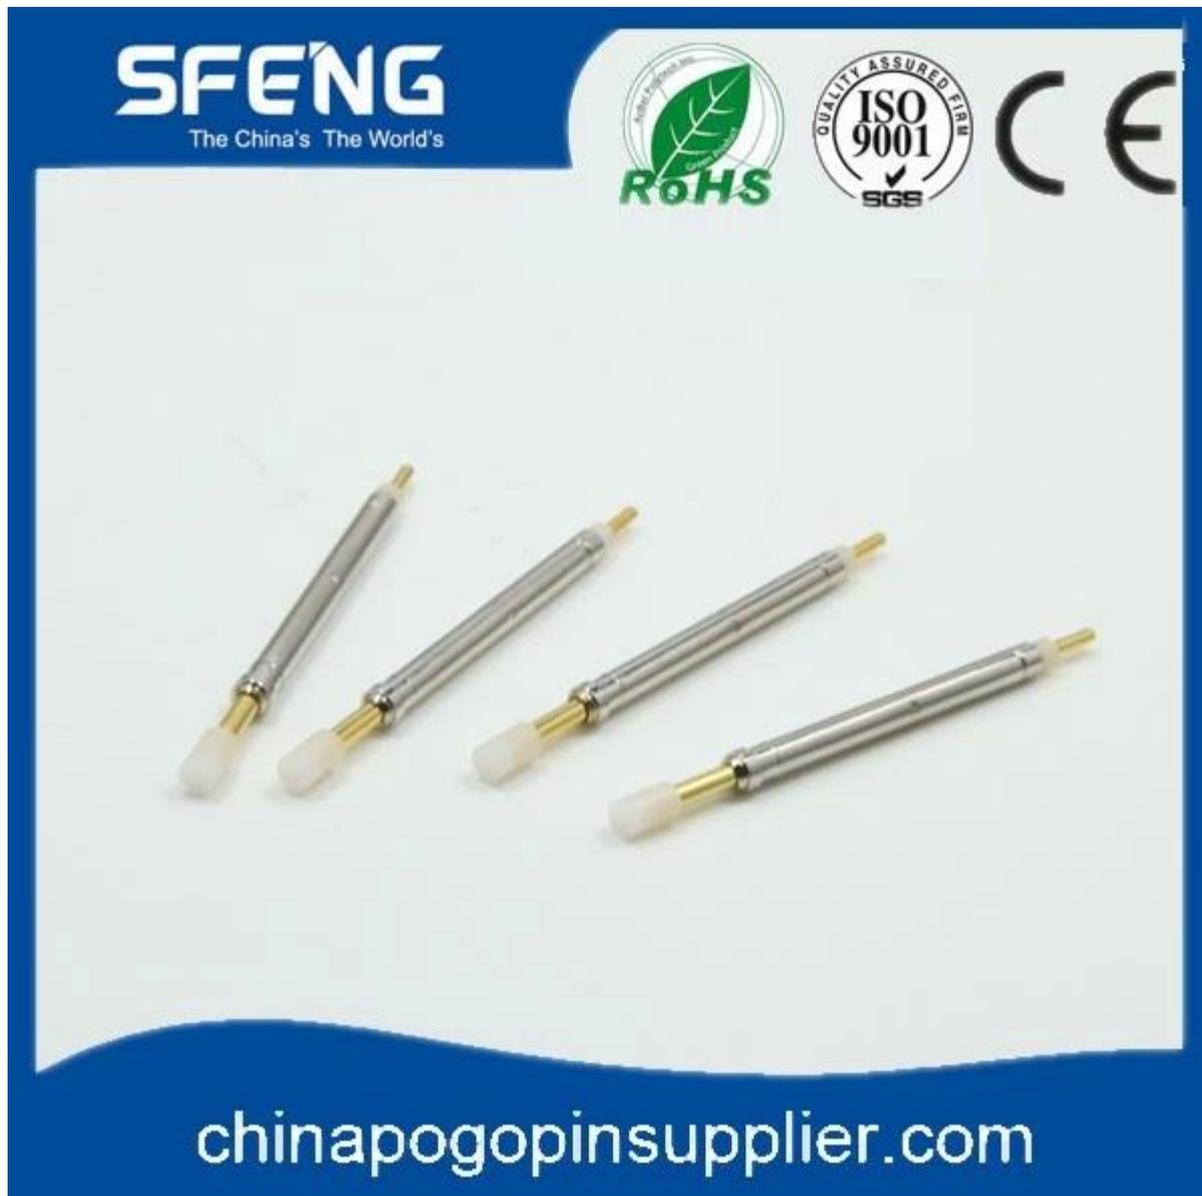

### Zeichnung:



**材质与电镀:**

- 1. 塑料头: POM
- 2. 针杆: 黄铜镀金
- 3. 针套: 黄铜管镀金
- 4. 绝缘套: PEEK
- 5. 尾针: 磷铜管镀金

**技术要求:**

- 开关距离: 1.5mm
- 开关距离弹力:  $100g \pm 20g$  1.5mm

**Technical parameters:**

- Working stroke: 1.5mm;
- Spring force:  $100g \pm 20g$  at 1.5mm.

**Material and Plating:**

- 1. Plastic tip: White POM;
- 2. Plunger: Brass, Au plating;
- 3. Barrel: Brass, Au plating;
- 4. Insulation sleeve: PEEK;
- 5. Tail pin: Phosphor bronze, Au plating;

				名称:		胜峰探针	
				新开关针 (改良)		说明:	
标记处数				图样标记		1. 修改: 2. 修改: 3. 修改:	
设计				视图		4. 修改: 5. 修改:	
校对				质量		6. 修改: 7. 修改:	
审核				比例		8. 修改: 9. 修改:	
工艺				1:1		10. 修改: 11. 修改:	
日期: 2017-7-7				共 1 页 第 1 页		图纸编号:	

**Unsere Vorteile:**

- 1. we have 30 years experience in probe pin and have ourself factory.
- 2. we provide free sample and have a testing department.
- 3. we could manufacture products as your request.
- 4. we guarantee best price and good service.

**Main Produkt:**

Spring loaded pin (single) for PCB, ICT, FCT testing etc;  
Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;  
Double ended probe for BGA and Semiconductor testing;  
Universal pin without spring, coating pin, LM pin with QZ and VZ series;  
High current probe, Switch probe, Capacitance needle;  
Terminal & receptacle /socket;  
Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

## **Test Ausrüstung:**

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

**Paket:**

