Pogo-Pin-Stecker mit Doppelkopfkontakt

Spezifikation:

Marke	SFENGSONDE
Artikelnummer	**Doppelkopf-Pogo-Pin** SF-0,45*25,8-BT
Material	Kolben: Becu/Au auf Ni-plattiert Kolben: SK4 / Au auf Ni-plattiert Gehäuse: PhBz/Au auf Ni-plattiert Frühling: SWP
Aktuelle Bewertung	0,5A
Kontakt Widerstand	≤100mΩ
Voller Schlag	6,8 mm
Bewerteter Schlaganfall	4,5 mm
Federkraft	75 ± 20 %
Zykluszeit	100.000 Mal
Mindestbestellmenge	100PCS wenn wir auf Lager haben
Vorlaufzeit	2–15 Tage nach Erhalt der Zahlung

Bild Zeigen:

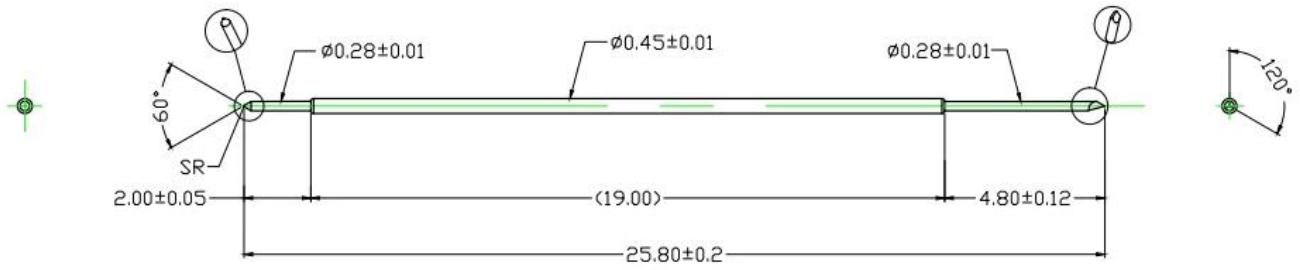

Unsere Vorteile:

1.we have 30 years experience in probe pin and have ourself factory.

2.we provide free sample and have a testing depa rtment.

3.we could manufacture products as your request.

4.we guarantee best price and good service.

Unser Hauptprodukt:

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semic onductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ a nd VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig loc ks, POM, Iron hinge etc

Ausrüstung testen:

Spring exhausted tester	DC power supply	Current resistance tester
Microscope	Tensile strength tester	Spring tester

Paket:

胜蜂电子