


Especificaciones del producto

Marca	SFENG
Número de artículo	SF-GB031B570D20-BB
Embolo	Becu, chapado en oro
Barril	Becu, chapado en oro.
Primavera	cable de musica
Recomendado Viajes	0,65 mm
Viaje completo	1,1 mm

Imagen del producto

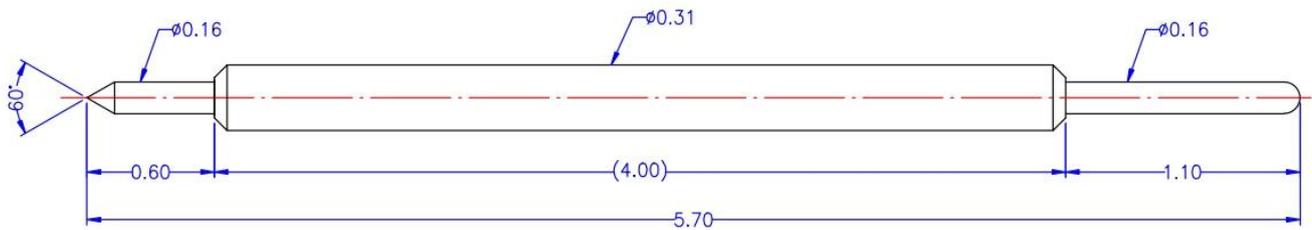

Nuestro servicio

1. Responda su consulta dentro de las 24 horas hábiles
2. El diseño personalizado está disponible, los OEM son bienvenidos
3. Entrega de los pines de sonda a nuestros clientes en todo el mundo con rapidez y precisión.
4. Proporcionar el precio más bajo con alta calidad a nuestro cliente

Productos principales

- Pasador con resorte (simple) para pruebas de PCB, TIC, FCT, etc.
- Pogo pin (conector) para establecer una conexión (generalmente temporal) entre dos placas de circuito impreso para cargar, localizar, baterías, semiconductores y interconectar aplicaciones;
- Sonda de doble extremo orBGA;pruebas;
- Pasador universal sin resorte, pasador de revestimiento, pasador LM con series QZ y VZ;
- Sonda de alta corriente, sonda de interruptor, aguja de capacitancia...
- Terminal&receptáculo/enchufe;
- Otros componentes electrónicos relacionados, 30#OKwire, Jig locks, POM, Ironhinge, etc.

Control de calidad

Spring exhausted tester	DC power supply	Current resistance tester
 A tall, white, industrial-grade cabinet with a glass door and a control panel on the right side.	 A white, rectangular device with a black front panel. It features a red emergency stop button, a red power switch, and several output terminals. The brand name 'YoRI' is visible on the top left.	 A white, rectangular device with a large green digital display showing '8888'. It has a warning symbol and a circular port on the right side.
Microscope	Tensile strength tester	Spring tester
 A white and black compound microscope with a digital camera attachment on top, mounted on a wooden desk.	 A blue and white mechanical testing machine with a vertical column and a sample holder, used for tensile testing.	 A white mechanical testing machine with a digital display and a control panel, used for testing springs.

Imagen de embalaje

