


Especificaciones Del Producto


Marca	SFENG
Número de artículo	SF-P080
Émbolo	Latón
Barril	Latón
Primavera	primavera
Primavera Fuerza	15g
Viaje completo	1.5 (0,0590 ")
Ración actual	0.3A
Resistencia actual	260mW
Brea	0,45 (0,0177 ")
Tamaño del orificio de montaje	0,35 (0,0138 ")
MOQ	100 PC
Tiempo de espera	7 días laborables después de recibir el pago

Imagen del producto


SF-P080




-J

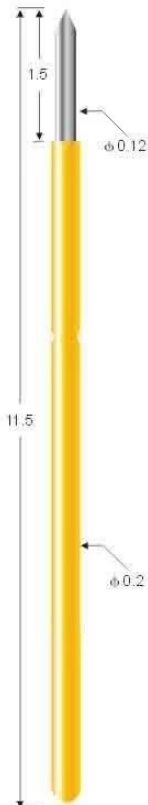

SF-P080-B



SF-R080-VR

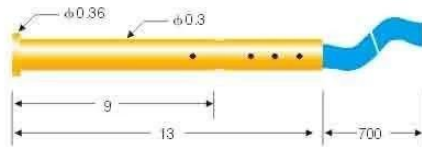

SF-R080-VRW

Probe specifications SF-P080 (技术规格)

- Recommended minimum center (最小间距): 0.45mm (.0177")
- Mounting hole size (钻孔尺寸): 0.35mm (.0138")
- Full travel (行程): 1.5 (.0590")
- Spring force (弹簧压力): 15g (克)
- Materials and finishes (材料及涂饰):
Plunger: SK4, Rh plated
Barrel: Phosphor bronze, Gold plated
Spring: Music wire, Gold plated
- Current rating (额定电流): 0.3A (安培)
- Contact resistance (接触电阻): 260mΩ (毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze, Gold plated

胜峰探针
SFENG
The China's The World's

RoHS

QUALITY ASSURED FIRM
ISO 9001
SGS

CE

chinapogopinsupplier.com

Nuestro Servicio

1. Podemos contestar su consulta dentro de 24 horas de trabajo.
2. modificado para requisitos particulares diseño está disponible y OEM son bienvenidos.
3. Podemos entregar las clavijas de la sonda a nuestros clientes en todo el mundo con velocidad y precisión.
4. Podemos proporcionar el precio más bajo con el producto de alta calidad a nuestros clientes .

Productos Principales

Pasador de resorte cargado (individual) de PCB, las TIC, las pruebas FCT etc;

Pin Pogo (conector) para establecer la conexión entre dos placas de circuito impreso para la carga, localización, batería, Semiconductor & amp; Aplicaciones de interconexión;

Sonda de doble punta para BGA y prueba de semiconductores;

Pin universal sin muelle, pin recubrimiento, pin LM con QZ y la serie VZ;

Alta sonda de corriente, sonda de interruptor, la aguja de la capacitancia;

Terminal & amp; receptáculo / zócalo;

Otros componentes electrónicos relacionados, 30 # alambre bien, cerraduras Jig, POM, Plancha bisagra etc.

Control De Calidad







Spring exhausted tester	DC power supply	Current resistance tester
 A tall, white, industrial-grade cabinet with a glass door and a control panel on the right side.	 A white, rectangular DC power supply unit with a black front panel. It features a red power switch, several control knobs, and output terminals.	 A white electronic device with a large green digital display showing '8888'. It has a 'BLU' indicator light and a circular port on the right side.
Microscope	Tensile strength tester	Spring tester
 A white and black compound microscope with a large objective lens and a camera attachment on top.	 A blue and white mechanical testing machine with a vertical frame and a sample holder.	 A white mechanical testing machine with a digital display and a control panel, used for testing springs.

Imagen del embalaje

