

Sonda escalonada SF-L106-A1.8

Material y acabados

Émbolo: bronce o latón o BeCu, chapado en oro o niquelado;

Barril: latón, chapado en oro o niquelado;


Resorte: acero inoxidable o hilo musical;

Imágenes


- Cualquier consejo que podamos proporcionarle
- Si le interesa, por favor contácteme



L106-F1.3

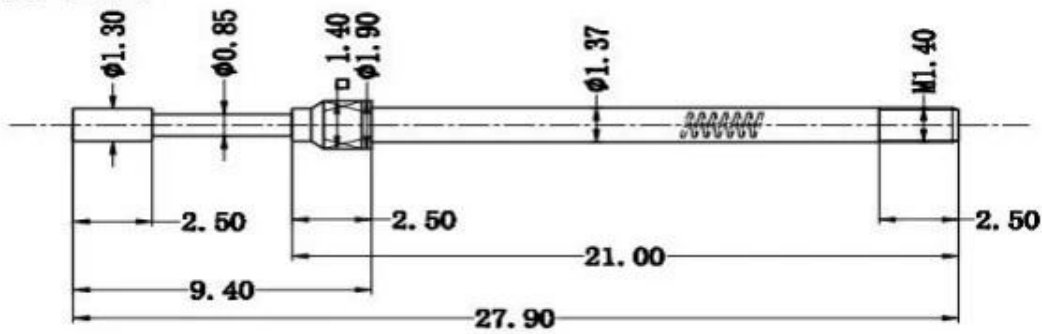

L106-套管

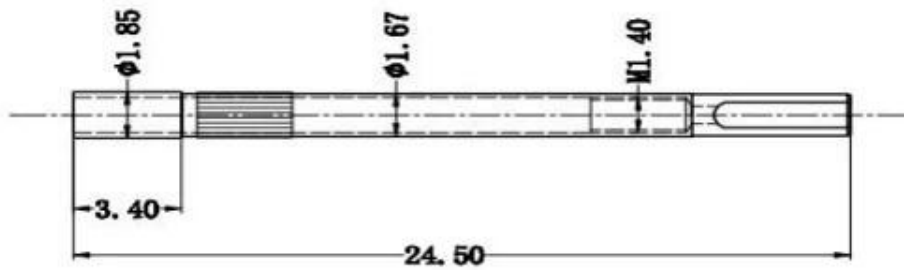

Nuestras ventajas

1. Tenemos 30 años de experiencia en pin de sonda y tenemos nuestra propia fábrica.
2. Proporcionamos muestra gratis y tenemos un departamento de pruebas.
3. podríamos fabricar productos como su solicitud.
4. garantizamos el mejor precio y buen servicio.


Nuestro producto principal

Spring loaded pin (single) for PCB, ICT, FCT testing etc;
Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;
Double ended probe for BGA and Semiconductor testing;
Universal pin without spring, coating pin, LM pin with QZ and VZ series;
High current probe, Switch probe, Capacitance needle;
Terminal & receptacle /socket;
Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Control de equipos de prueba



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope

Embalaje y envío

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

