


Conector pin Pogo de contacto de doble cabeza

Especificación:

Marca	SFENGINVESTIGACION
Número de artículo	Pasador pogo de doble cabeza SF-0,45*25,8-BT
Material	Émbolo: Becu/Au en Ni plateado Émbolo: SK4 / Au en Ni plateado Barril: PhBz / Au en Ni plateado Primavera: SWP
Valoración actual	0.5A
Resistencia de contacto	$\leq 100\text{m}\Omega$
Carrera completa	6,8 mm
Carrera nominal	4,5 mm
Fuerza de la primavera	$75\pm 20\%$
Tiempo del ciclo	100.000 veces
Cantidad mínima de pedido	100PCS si tenemos stock
Tiempo de espera	2-15 días después de recibir el pago

Imagen Espectáculo:

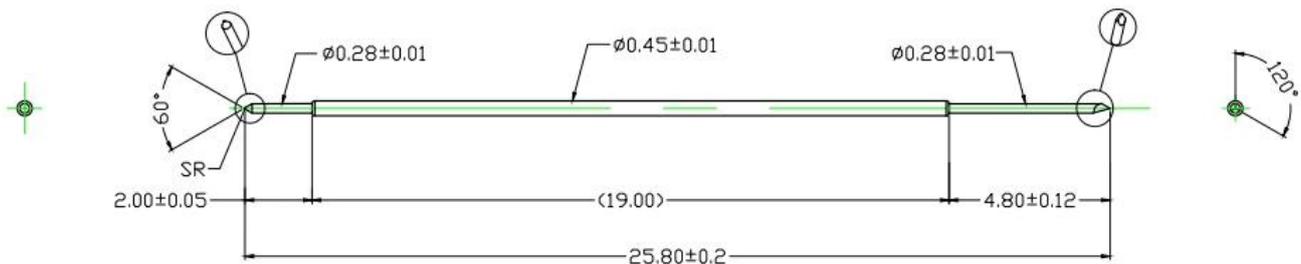

Nuestras ventajas:

1. we have 30 years experience in probe pin and have ourself factory.
2. we provide free sample and have a testing department.
3. we could manufacture products as your request.
4. we guarantee best price and good service.

Nuestro producto principal:

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Equipo de pruebas:

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Paquete:

