





chapado en oro de latón sonda de prueba Pogo PIN para el accesorio de prueba SF-P125

#### Introducción de la compañía

Suzhou Shengteng Electronic Co., Ltd se está especializando en la sonda de primavera y el PIN Pogo con alta calidad, precio bajo y entrega rápida. Tenemos nuestra propia marca de fábrica, nosotros nos dedicamos siempre a alcanzar estándares internacionales, nuestra compañía hemos pasado la certificación de las gerencias de la calidad ISO9001-2008 y nuestros productos se califican de RoHS.

Sonda de prueba PIN SF-P125 dibujo

# SF-P125

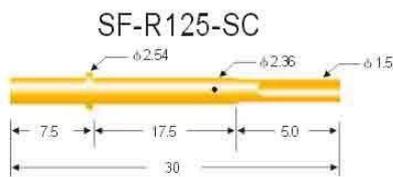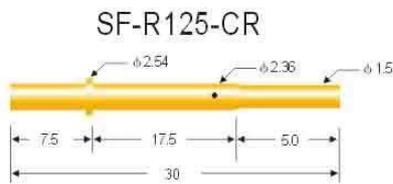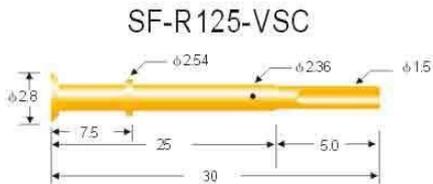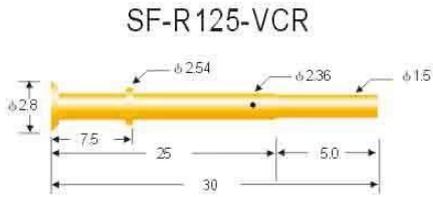

## Probe specifications SF-P125(技术规格)

- Recommended minimum Spacing 最小间距): 3.17mm(.1248")
- Mounting hole size(钻孔尺寸):  
压克力: 2.40mm(.0945")  
电木板、玻璃纤维板: 2.45mm(.0965")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Ni plated;  
Barrel: Brass, Gold plated  
Spring: Stainless steel
- Current ration(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式):  
Crimp: R125-VCR, R125-CR  
Solder cup: R125-VSC, R125-SC  
Material of receptacle: brass, gold plated

