

## Test de PCB Pointe de test à pointe pointue SF-PA100-B

### Matériau et finitions

Piston: bronze ou laiton ou BeCu, plaqué or ou nickelé;

Canon: laiton, plaqué or ou nickelé;

Ressort: fil d'acier inoxydable ou de musique;

### Des photos

- Tous les conseils, nous pourrions vous fournir
- Si vous êtes intéressé, contactez-moi




## SF-P100




SF-P100-E

### Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(1000")
- Mounting hole size(钻孔尺寸): 压克力: 1.70mm(.0670")  
电木板、玻璃纤维板: 1.75mm(.0689")
- Full travel(行程): 6.40(.2520")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated; SK4, Rh plated  
Barrel: Brass, Gold plated  
Spring: Stainless steel
- Current rating(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

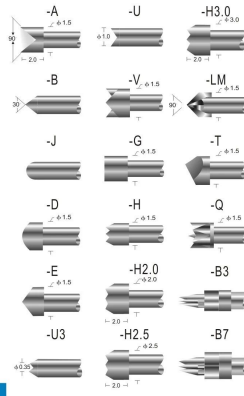

## SF-R100

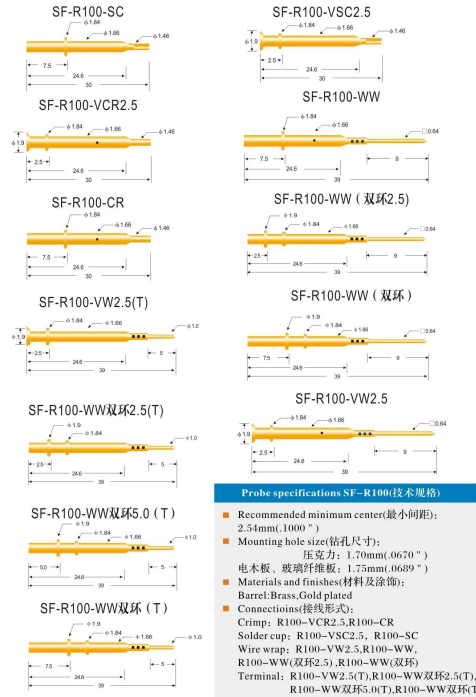

### Probe specifications SF-R100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(1000")
- Mounting hole size(钻孔尺寸): 压克力: 1.70mm(.0670")  
电木板、玻璃纤维板: 1.75mm(.0689")
- Materials and finishes(材料及涂饰):  
Barrel: Brass, Gold plated
- Connections(接线形式):  
Crimp: R100-VCR2.5, R100-CR  
Solder cup: R100-VSC2.5, R100-SC  
Wire wrap: R100-VW2.5, R100-WW  
R100-WW(双环2.5), R100-WW(双环)  
Terminal: R100-VW2.5(T), R100-WW双环2.5(T), R100-WW双环5.0(T), R100-WW双环(T)







## Nos avantages

1. nous avons 30 ans d'expérience dans la broche de sonde et avons nous-mêmes l'usine.
2. nous fournissons un échantillon gratuit et avons un département de test.
3. nous pourrions fabriquer des produits en tant que votre demande.
4. nous garantissons le meilleur prix et un bon service.

## Notre produit principal

Spring loaded pin (single) for PCB, ICT, FCT testing etc;  
Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;  
Double ended probe for BGA and Semiconductor testing;  
Universal pin without spring, coating pin, LM pin with QZ and VZ series;  
High current probe, Switch probe, Capacitance needle;  
Terminal & receptacle /socket;  
Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Contrôle de l'équipement de test

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Paquet

