


Connecteur à broches Pogo à Contact double tête

Spécification:

Marque	SFENG SONDE
Article Nombre	Épingle pogo double tête GB031D570D20-BB-A6
Matériel	Piston : Becu / Plaqué Or Piston : Becu / Plaqué Or Canon : PhBz / Plaqué Or Ressort : Fil à musique / Plaqué Or
Printemps forcer	20g
Voyage recommandé	0,65 mm
Voyage complet	1,1 mm
Pas	0,45
Contact Résistance	100m ohm
Temps d'un cycle	100 000 fois
MOQ	100 pièces si nous avoir action
Plomb temps	2-15 jours après recevoir le paiement



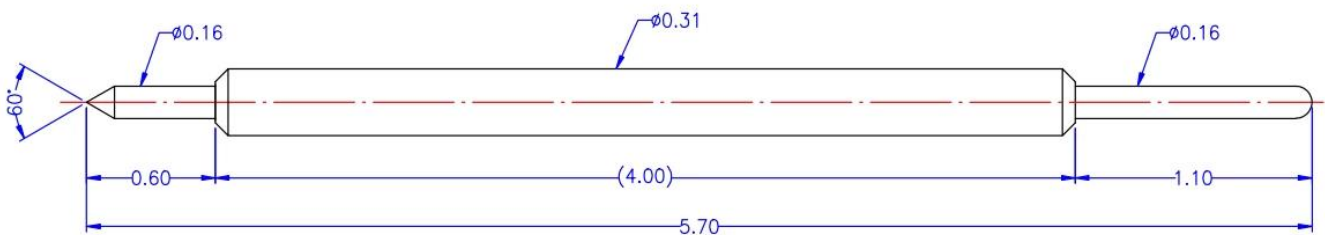





Nos avantages:

1. we have 30 years experience in probe pin and have ourself factory.
2. we provide free sample and have a testing department.
3. we could manufacture products as your request.
4. we guarantee best price and good service.

Notre Principal Produit :

Spring loaded pin (single) for PCB, ICT, FCT testing etc;
Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;
Double ended probe for BGA and Semiconductor testing;
Universal pin without spring, coating pin, LM pin with QZ and VZ series;
High current probe, Switch probe, Capacitance needle;
Terminal & receptacle /socket;
Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Test de l'Équipement:

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Emballer:

