Connecteur à broches Pogo à contact double tête

Spécification:

Marque	SFENGSONDE
Numéro d'article	**Épingle pogo double tête** SF-0,45*25,8-BT
Matériel	Plongeur : Becu / Au sur Plaqué Ni Plongeur : SK4 / Au sur Plaqué Ni Canon : PhBz / Au sur Plaqué Ni Printemps : SWP
Note actuelle	0,5A
Résistance des contacts	≤100 mΩ
Course complète	6,8 mm
Course nominale	4,5 mm
Force du ressort	75 ± 20 %
Temps d'un cycle	100 000 fois
MOQ	100PCS si nous avons stock
Délai de mise en œuvre	2-15 jours après réception du paiement

Image Montrer:

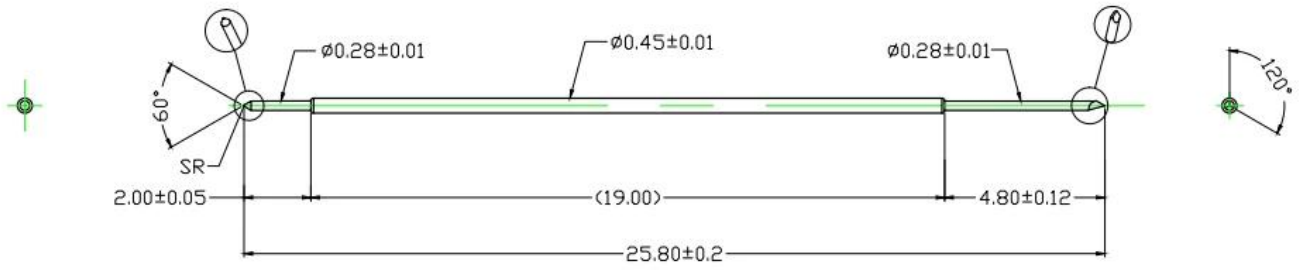

Nos avantages:

1.we have 30 years experience in probe pin and have ourself factory.

2.we provide free sample and have a testing depa rtment.

3.we could manufacture products as your request.

4.we guarantee best price and good service.

Notre Principal Produit :

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semic onductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ a nd VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig loc ks, POM, Iron hinge etc

Test de l'Équipement:

Spring exhausted tester	DC power supply	Current resistance tester
Microscope	Tensile strength tester	Spring tester

Emballer:

胜蜂电子