

## Product Specification

Brand	SFENG
Item number	SF-P100
Plating	Ni-plated or Gold-plated
Lead time	7 working days after receiving the payment

## Product Picture





**SFENG**  
The China's The World's



szsfeng@126.com alibaba.com

[WWW.SF-PROBE.COM](http://WWW.SF-PROBE.COM)

# SF-P100

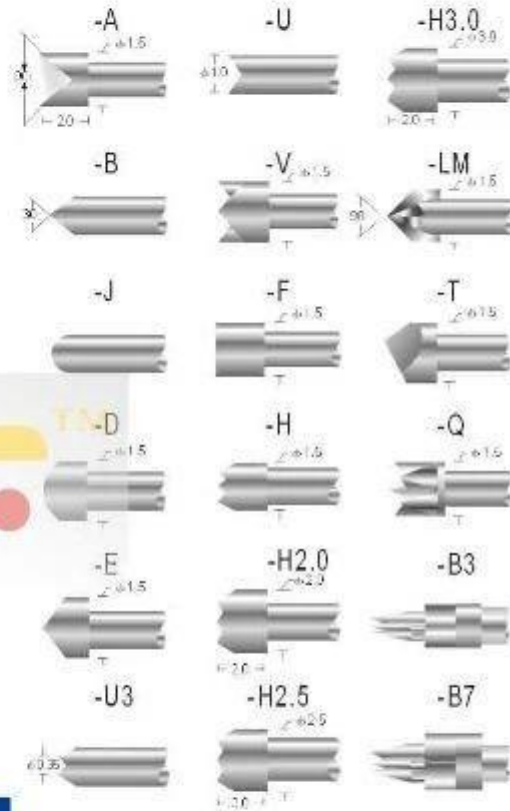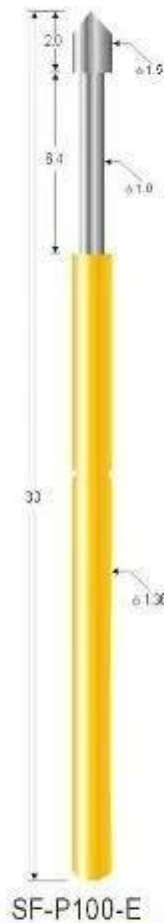

## Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000")
- Mounting hole size(钻孔尺寸):  
压克力: 1.70mm(.0670")  
电木板、玻璃纤维板: 1.75mm(.0689")
- Full travel(行程): 6.40(.2520")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated; SK4, Rh plated  
Barrel: Brass, Gold plated  
Spring: Stainless steel
- Current rating(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧级)

[www.shengfengdz.com](http://www.shengfengdz.com)

## Our Service

1. We can reply your inquiry within 24 working hours.
2. Customized design is available and OEM are welcomed.
3. We can deliver the probe pins to our clients all over the world with speed and precision.
4. We can provide the lowest price with high quality product to our client .

## Main Products

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;







Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

## Quality Control

Spring exhausted tester	DC power supply	Current resistance tester
 A large, white, industrial-grade testing machine with a glass viewing window and a control panel on the right side.	 A white, rectangular DC power supply unit with a black front panel. It features a red power switch, several analog meters, and multiple output terminals.	 A white, rectangular testing device with a large green digital display showing '8888'. It has a control knob and several indicator lights on the front panel.
Microscope	Tensile strength tester	Spring tester
 A white and black compound microscope with a large objective lens and a stage.	 A blue and white tensile testing machine with a vertical column and a sample holder.	 A white and blue spring testing machine with a vertical column and a digital display on the base.



## Packing Picture

