


Production specifications

Item number	SF-P50
Pitch	1.27mm
Mounting hole size	V:0.90mm W:0.95mm
Full travel	2.5
Spring force	100g
Current ration	1.5A
Current resistance	50mΩ
MOQ	100PCS
Payment	T/T
Delivery time	5-10days after receiving the payment


Product Pictures

SF-P50

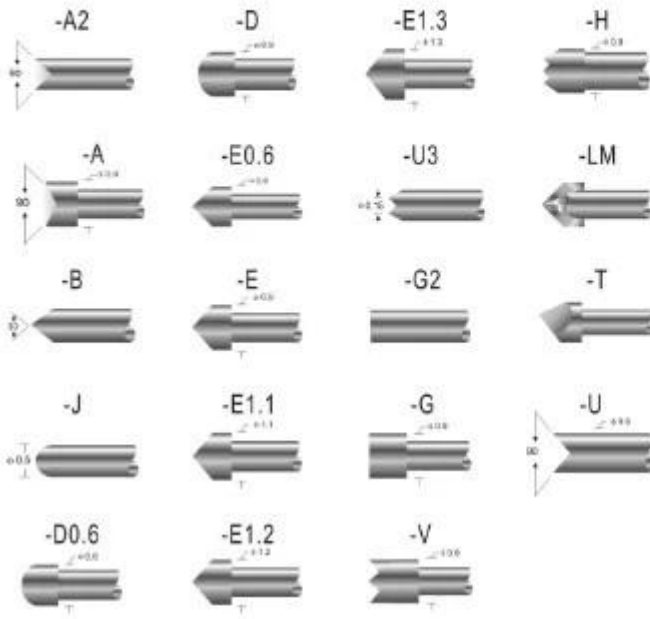

Probe specifications SF-P50(技术规格)

- Recommended minimum center(最小间距): 1.27mm(.0500")
- Mounting hole size(钻孔尺寸):
V: 0.90mm(.0354")
W: 0.95mm(.0374")
- Full travel(行程): 2.5(.0984")
- Spring force(弹簧压力): 100g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Phosphor bronze, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 1.5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

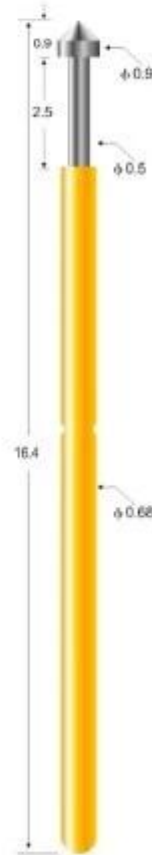

SF-P50-E



Production Flow



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing

Testing Equipment

Measuring Equipment >



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test

Packing



Main products

- 1.Spring loaded pin(single)for PCB,ICT,FCTtesting etc;
- 2.Pogo pin(connector)to establish connection between two printed circuit boards for charging,locating,battery,semiconductor&interconnector applications;
- 3.Double ended probes for BGA and semiconductor testing;
- 4.Universal pin without spring,coating pin,LM pin with QZ and VZ series;
- 5.High current probe,switch probe,capacitance needle;
- 6.Terminal&receptacle/socket;
- 7.Other related electronic components,Jig locks,POM and etc.

Whatever you want,please contact us without hesitation ,and we will try our best to meet your requirement within our capability.

Our service

- 1.We can reply your inquiry within 24 working hours;
- 2.Customized design is availble and OEM are welcomed;
- 3.We can deliver the probe pins to our clients all over the world with speed and precision.

4. We can provide the lowest price with high quality products to our clients.