


Technical Specifications

Cards	SFENG
Model	SF-P75
Needle bar	Brass or beryllium copper, gold or nickel-plated
Needle	Brass, gold or nickel plated
Spring	SK4, music line
Elasticity	120 g
All tourism	3.35 mm
Electric current	3A
Resistance	Is 50mΩ.
Minimum spacing	1.9 mm
Mounting Hole Size	1.35 mm
MOQ	100
delivery time	7 working days after receipt of payment

Product Image

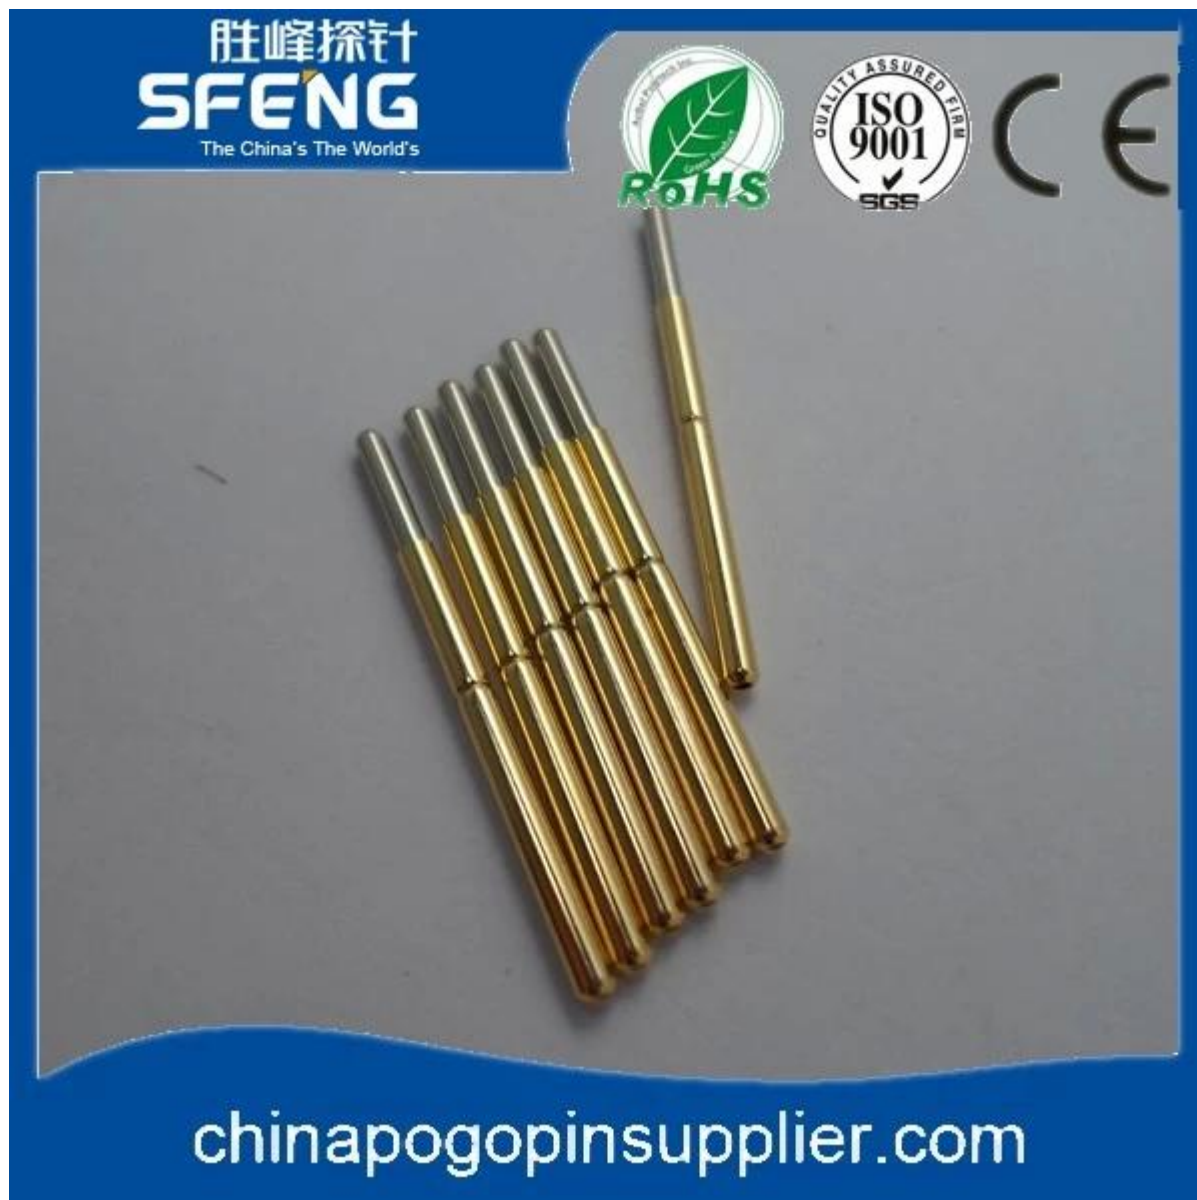

胜峰探针
SFENG
The China's The World's



chinapogopinsupplier.com

our service







1. to respond to your inquiry within 24 working hours
2. You can customize the product, welcome OEM
- To customers around the country 3. fastest delivery probe
- 4, the lowest price, the best quality to customers

main products

- For the PCB, ICT, FCT testing
- Ejector pin charging printed circuit boards, positioning the semiconductor
- For BGA and amplifier; amp; needle semiconductor test;

- No spring straight needle, insulated needle, LM needle;
- High current needle, switch needle, needle fusion ...
- Terminal; socket / socket;
- O and other related electronic parts, 30 # OKwire, rack deduction, POM.

Quality control

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Packing pictures

