



## Product Description

High-current probes are characterised by a specific probe design with low resistance. ([contact probe factory china](#).) The main focus here is to avoid a too strong temperature increase of the probes or the individual probe components and to optimise the contact to the test item.

## Product drawing:

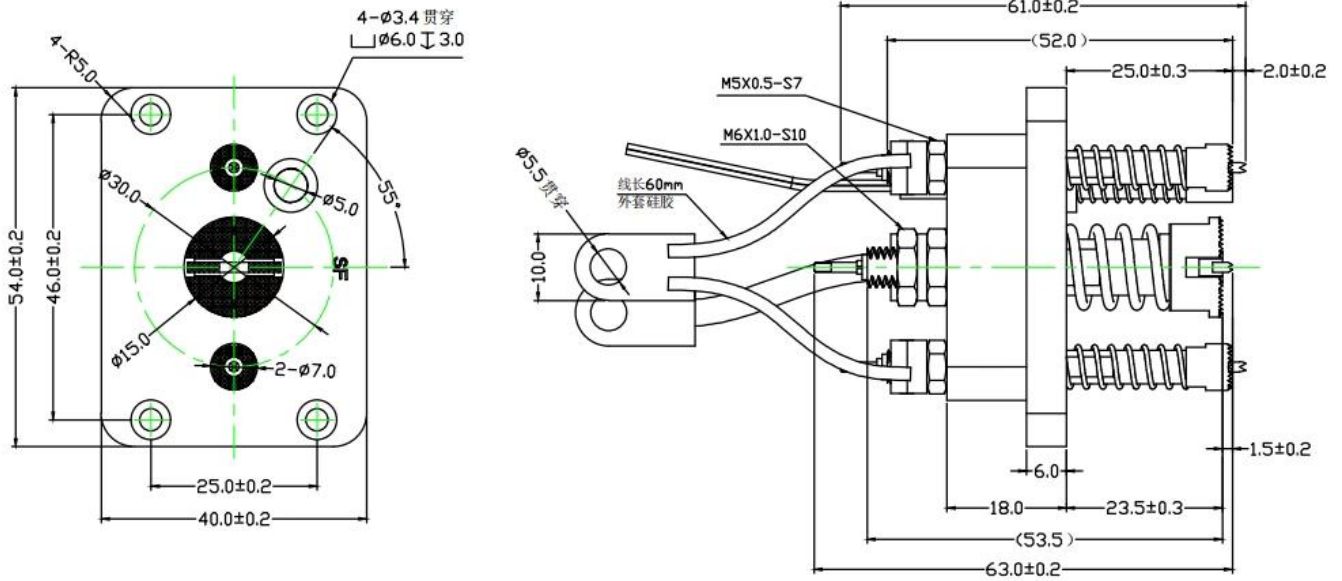

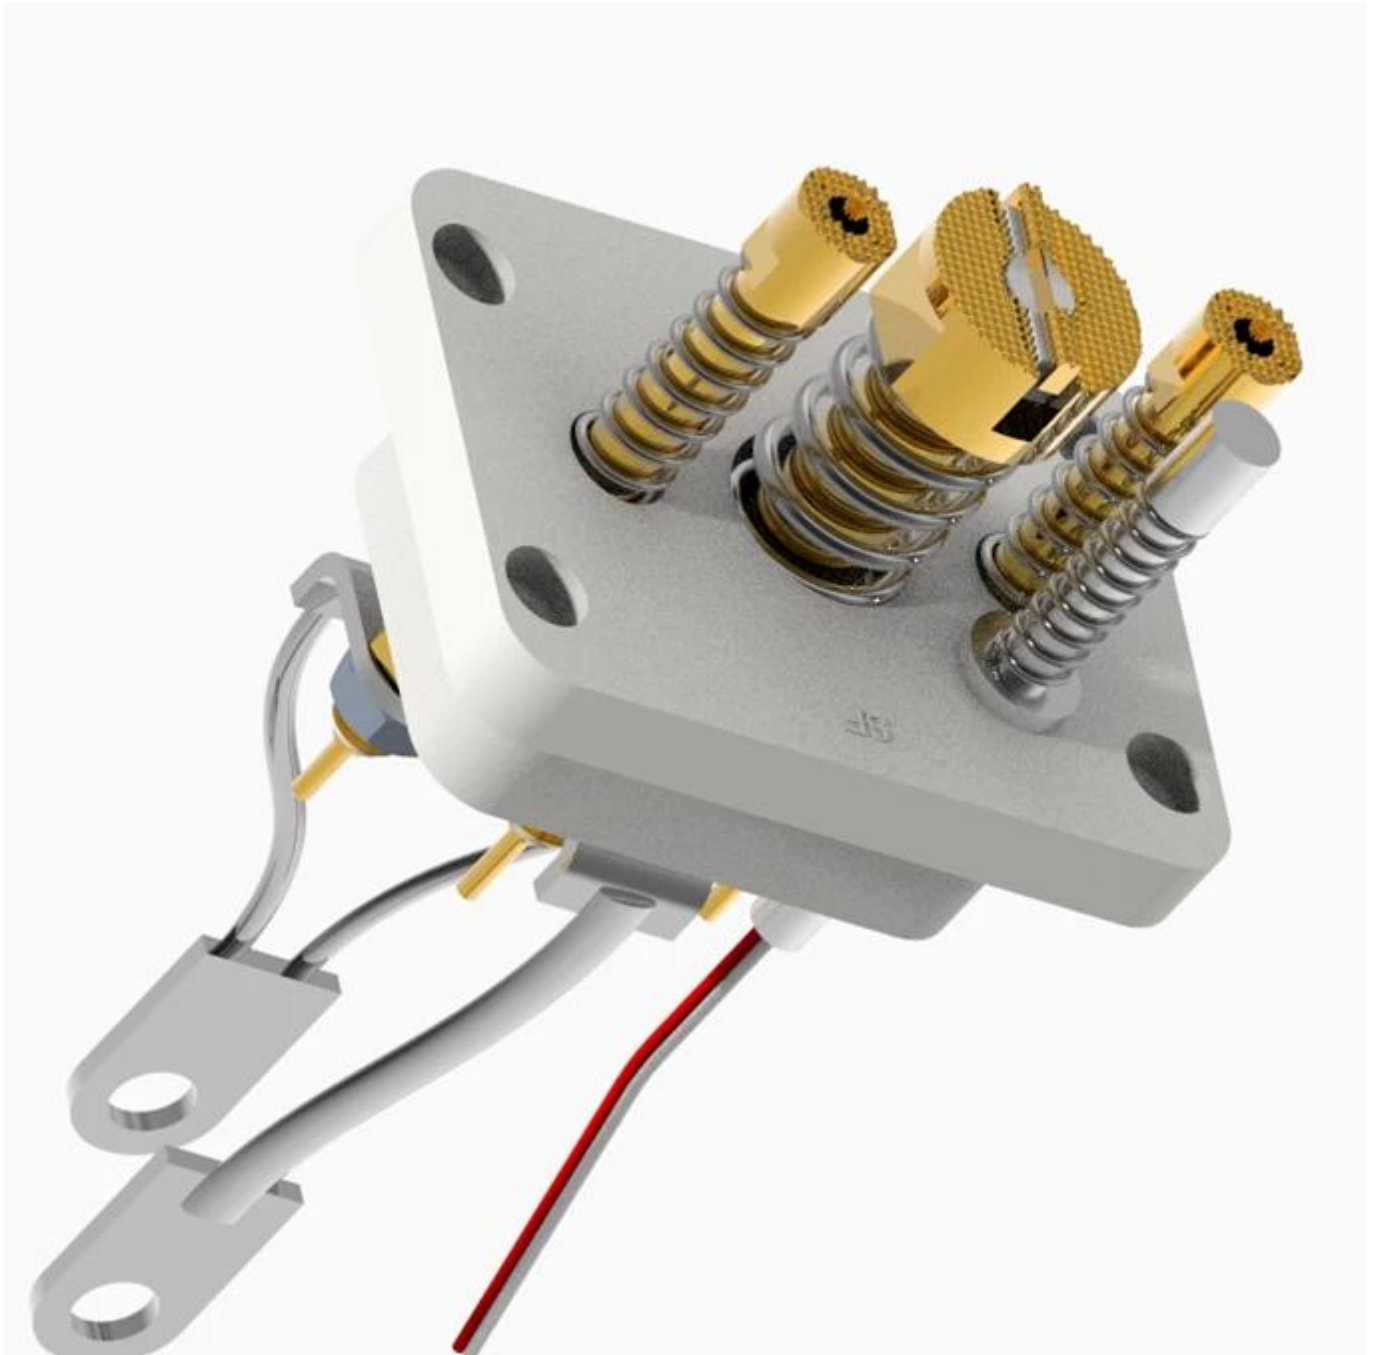

### Product Parameters:


Product Name	40A probe pin set
Item No.	SF-15-7-6
40A Probe pin sets	15.0 voltage pin, 7.0 coaxial pin x 2pcs, 5.0 temperature needle
15.0 Voltage pin	Material: Copper, Gold plated or Ni plated Full travel $\geq 8.0\text{mm}$ Spring force: $2.5\text{kg} \pm 20\%$ Current rating: 40A

7.0 Coaxial pin	Material: Copper, Gold plated or Ni plated Full travel $\geq 8.0\text{mm}$ Spring force: $2\text{kg}\pm 20\%$ Current rating: 40A
5.0 Temperature needle	Material: Copper, Ni plated Full travel $\geq 10.0\text{mm}$ Spring force: $200\text{g}\pm 20\%$ (when working travel to 7.0mm)

## Applications:

The applications for high-current probes are diverse and range from fixture construction and wire harness testing to special applications, such as charging and discharging processes in battery production.

## Application

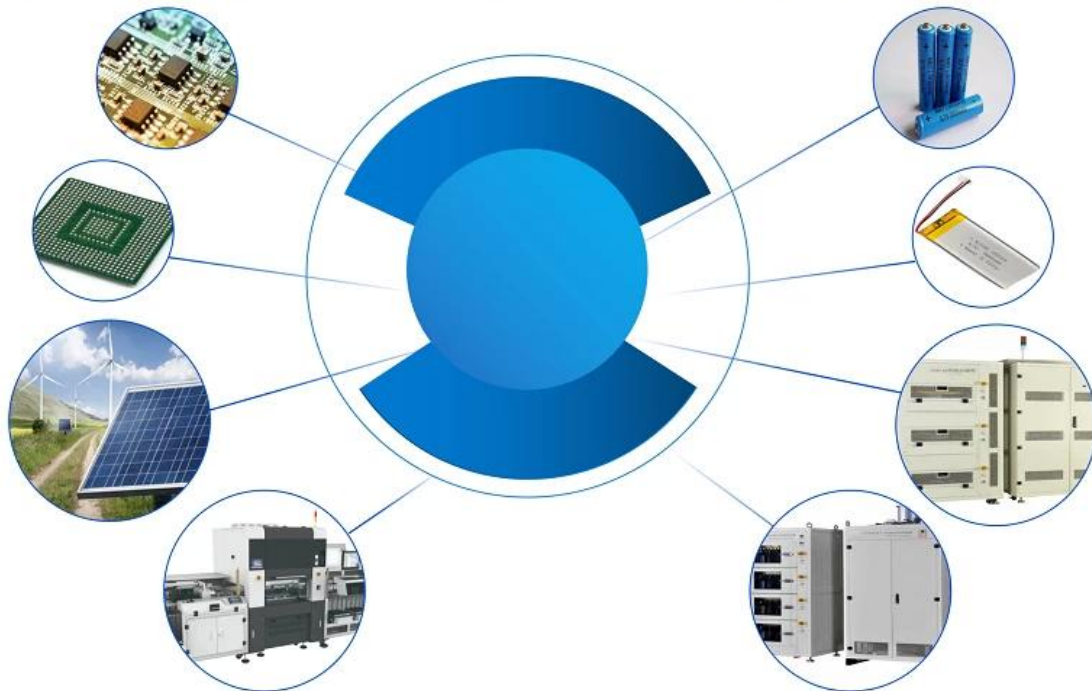

## Package:



## Logistics:

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc

For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



**Factory Show:**





