


Double Head contact Pogo Pin Connector

Specification:

| | |
|--------------------|--|
| Brand | SFENG PROBE |
| Item Number | Double head pogo pin GB031D570D20-BB-A6 |
| Material | Plunger : Becu / Gold Plated Plunger : Becu / Gold Plated Barrel : PhBz / Gold Plated Spring : Music wire / Gold Plated |
| Spring force | 20g |
| Recommended travel | 0.65mm |
| Full travel | 1.1mm |
| Pitch | 0.45 |
| Contact Resistance | 100m ohm |
| Cycle time | 100,000times |
| MOQ | 100PCS if we have stock |
| Lead time | 2-15days after receiving the payment |

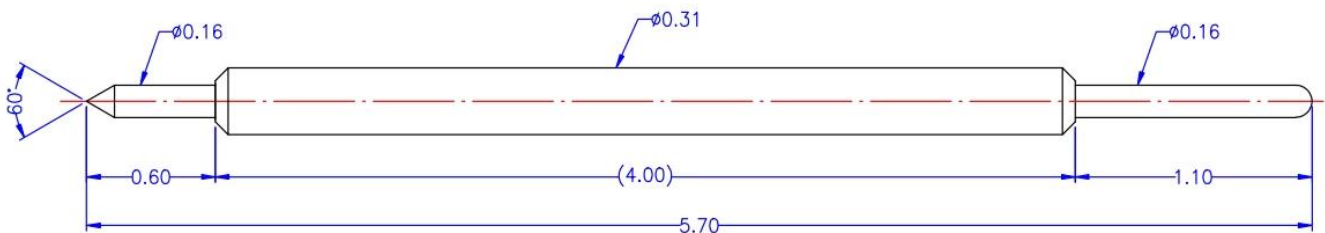

Our Advantages:

1. we have 30 years experience in probe pin and have ourself factory.
2. we provide free sample and have a testing department.
3. we could manufacture products as your request.
4. we guarantee best price and good service.

Our Main Product:

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Testing Equipment:

| | | |
|--|--|---|
| Spring exhausted tester | DC power supply | Current resistance tester |
|  |  |  |
| Microscope | Tensile strength tester | Spring tester |
|  |  |  |

Package:

