


Production specifications

Item number	SF6718
Size	dia3.4*40.0mm
Material	Plunger:SK4, Ni plated Barrel:Brass, Ni plated Tail Pin:Brass,Gold plated
Switch path	0.5±0.2mm
Full travel	3.5mm
Spring force	2000±20%g
MOQ	100PCS
Payment	T/T
Delivery time	5-15days after receiving the payment

Product Pictures

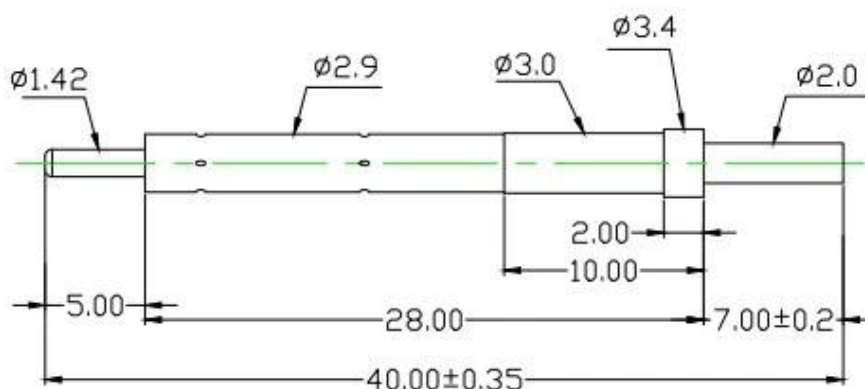

材质与电镀:

1. 针头: 易车铁镀镍
2. 针套: 黄铜镀镍
3. 尾针: 黄铜镀金

技术要求:

- 满行程: 3.5mm
- 额定行程: 2.0mm
- 额定弹力: $2000 \pm 20\%$ g
- 开关距离: 0.5 ± 0.2 mm

				名称: SF-开关针3.0X40.0-G2.0		胜峰科技	
						说明: 1. 所有尺寸单位为mm 2. 未注圆角尺寸公差: 按GB1804-TD 11级精度执行	
设计	标准化	签字	日期	图样标记	视图	质量	比例
校对	审定			S	A	1:1	/
审核	制图	HJQ		图纸编号:			
工艺	日期	2021-11-3		共 1 页 第 1 页			

Production Flow



Production Flow (生产流程)



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection






5. Finished products



6. Packing

Testing Equipment

Measuring Equipment >



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test

Packing



Main products

- 1.Spring loaded pin(single)for PCB,ICT,FCTtesting etc;
- 2.Pogo pin(connector)to establish connection between two printed circuit boards for charging,locating,battery,semiconductor&interconnector applications;
- 3.Double ended probes for BGA and semiconductor testing;
- 4.Universal pin without spring,coating pin,LM pin with QZ and VZ series;
- 5.High current probe,switch probe,capacitance needle;
- 6.Terminal&receptacle/socket;
- 7.Other related electronic components,Jig locks,POM and etc.

Whatever you want,please contact us without hesitation ,and we will try our best to meet your requirement within our capability.

Our service

- 1.We can reply your inquiry within 24 working hours;
- 2.Customized design is available and OEM are welcomed;
- 3.We can deliver the probe pins to our clients all over the world with speed and precision.
- 4.We can provide the lowest price with high quality products to our clients.