


Sonda di commutazione Micron per test PCB

Specifica:

Brand	SFENG
Item number	SF-SW2.96*49MM
Plunger	Brass
Barrel	Brass
Spring	SUS
Spring Force	100g@1.5mm
MOQ	100 pcs
Lead time	Within 2 working days after receiving the payment
Payment	T/T, Western union, Paypal or others.

Immagine:

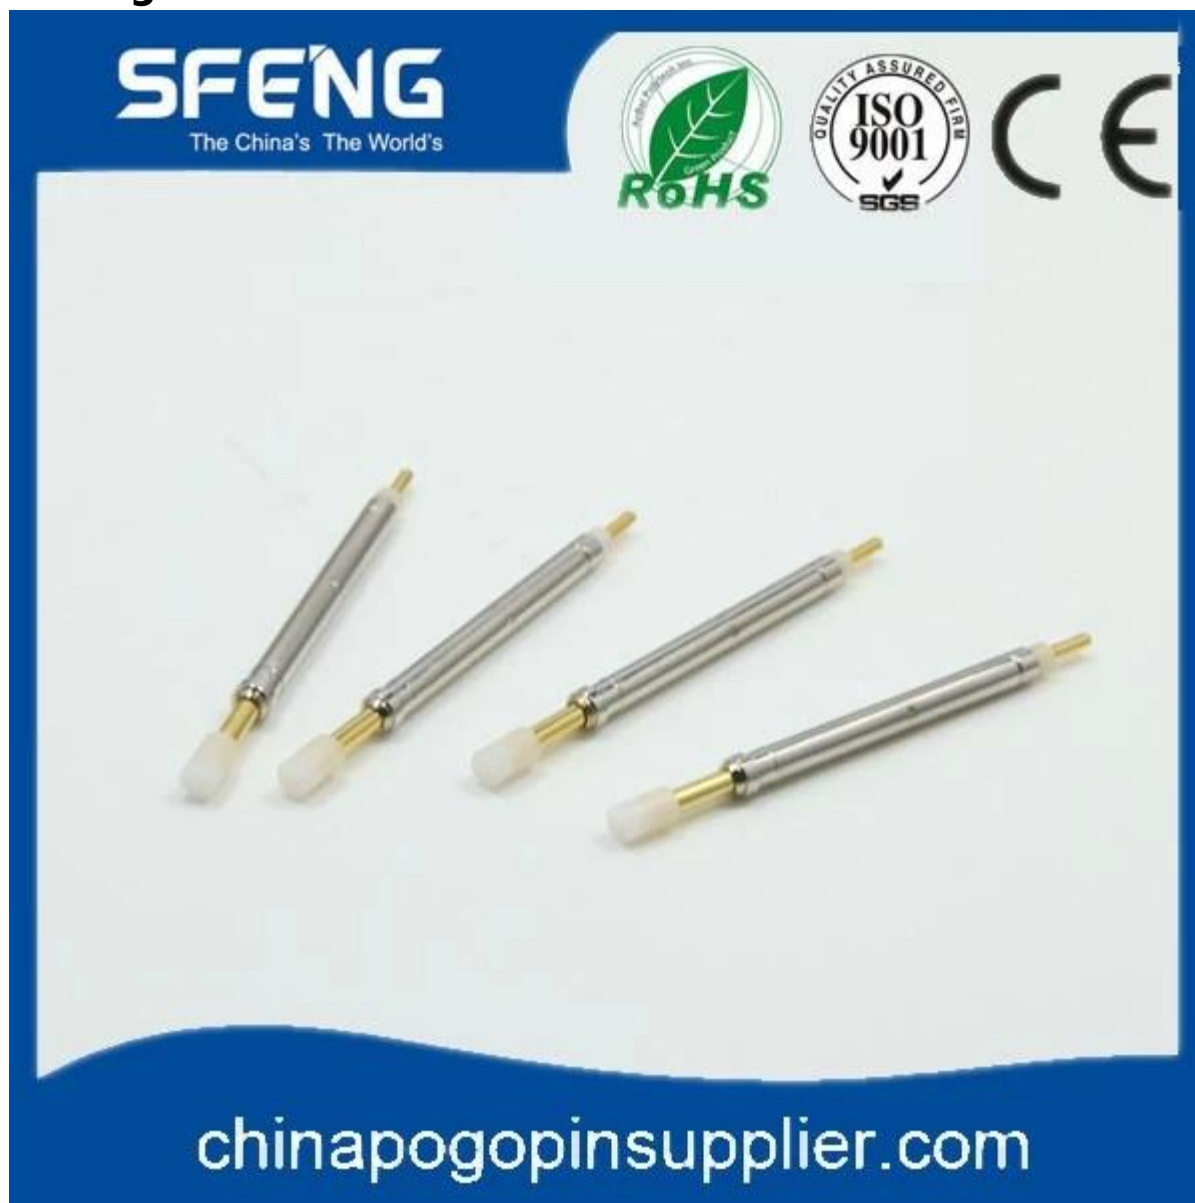

Disegno:



材质与电镀:

1. 塑料头: POM
2. 针杆: 黄铜镀金
3. 针套: 黄铜管镀金
4. 绝缘套: PEEK
5. 尾针: 磷铜管镀金

技术要求:

- 开关距离: 1.5mm
 开关距离弹力: 100g ± 20g 1.5mm

Technical parameters:

- Working stroke: 1.5mm;
 Spring force: 100g ± 20g at 1.5mm.

Material and Plating:

1. Plastic tip: White POM;
2. Plunger: Brass, Au plating;
3. Barrel: Brass, Au plating;
4. Insulation sleeve: PEEK;
5. Tail pin: Phosphor bronze, Au plating;

				名称:		胜峰探针	
				新开关针 (改良)		说明:	
标记处数				图样标记		1. 修改: 无	
设计				视图		2. 标准: GB/T 1804-2000	
校对				质量		3. 公差: 未注公差按 GB/T 1804-2000 执行	
审核				比例		4. 比例: 1:1	
工艺				日期		5. 日期: 2017-7-7	
				共 1 页		第 1 页	
				S A		图样编号:	







I nostri vantaggi:

1. we have 30 years experience in probe pin and have ourself factory.
2. we provide free sample and have a testing department.
3. we could manufacture products as your request.
4. we guarantee best price and good service.

Principale Prodotto:

Spring loaded pin (single) for PCB, ICT, FCT testing etc;
Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;
Double ended probe for BGA and Semiconductor testing;
Universal pin without spring, coating pin, LM pin with QZ and VZ series;
High current probe, Switch probe, Capacitance needle;
Terminal & receptacle /socket;
Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Apparecchiature di prova:

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Pacchetto:

