Connettore Pogo Pin a doppio contatto

Specifica:

Marca	SFENG SONDA
Articolo Numero	**Perno pogo a doppia testa** GB031D570D20-BB-A6
Materiale	Stantuffo: Becu/placcato oro Stantuffo: Becu/placcato oro Canna: PhBz/placcata oro Molla: filo armonico/placcato oro
Primavera forza	20 g
Viaggio consigliato	0,65 mm
Viaggio completo	1,1 mm
Pece	0,45
Contatto Resistenza	100 metri ohm
Tempo di ciclo	100.000 volte
MOQ	100 pezzi Se Noi Avere azione
Guida tempo	2-15 giorni Dopo ricevere IL pagamento

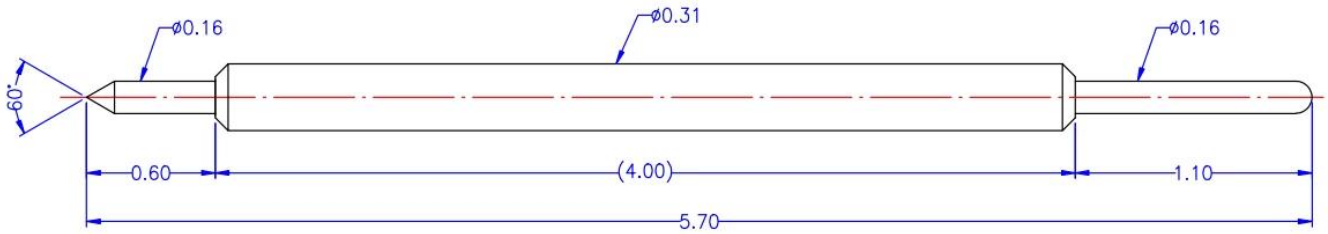

I nostri vantaggi:

1.we have 30 years experience in probe pin and have ourself factory.

2.we provide free sample and have a testing depa rtment.

3.we could manufacture products as your request.

4.we guarantee best price and good service.

Il nostro prodotto principale:

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semic onductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ a nd VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig loc ks, POM, Iron hinge etc

Attrezzatura di prova:

Spring exhausted tester	DC power supply	Current resistance tester
Microscope	Tensile strength tester	Spring tester

Pacchetto: