


Connettore Pogo Pin a doppio contatto

Specifica:

Marca	SFENSONDA
Codice articolo	Perno pogo a doppia testa SF-0,45*25,8-BT
Materiale	Stantuffo: Becu/Au su Ni placcato Pistone: SK4 / Au su Ni placcato Canna: PhBz/Au su placcatura Ni Primavera: SWP
Valutazione attuale	0,5 A
Resistenza di contatto	$\leq 100\text{m}\Omega$
Corsa completa	6,8 mm
Corsa nominale	4,5 mm
Forza della molla	$75\pm 20\%$
Tempo di ciclo	100.000 volte
MOQ	100 pezzi se abbiamo azione
Tempi di consegna	2-15 giorni dopo aver ricevuto il pagamento

Immagine Spettacolo:

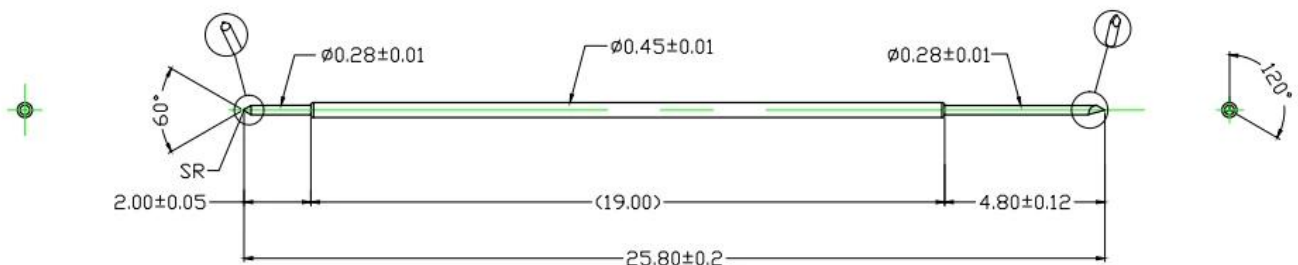

I nostri vantaggi:

1. we have 30 years experience in probe pin and have ourself factory.
2. we provide free sample and have a testing department.
3. we could manufacture products as your request.
4. we guarantee best price and good service.

Il nostro prodotto principale:

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;







Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Attrezzatura di prova:

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Pacchetto:

