Connettore Pogo Pin a doppio contatto

Specifica:

Marca	SFENGSONDA
Codice articolo	**Perno pogo a doppia testa** SF-0,45*25,8-BT
Materiale	Stantuffo: Becu/Au su Ni placcato Pistone: SK4 / Au su Ni placcato Canna: PhBz/Au su placcatura Ni Primavera: SWP
Valutazione attuale	0,5 A
Resistenza di contatto	≤100mΩ
Corsa completa	6,8 mm
Corsa nominale	4,5 mm
Forza della molla	75±20%
Tempo di ciclo	100.000 volte
MOQ	100 pezzi se abbiamo azione
Tempi di consegna	2-15 giorni dopo aver ricevuto il pagamento

Immagine Spettacolo:

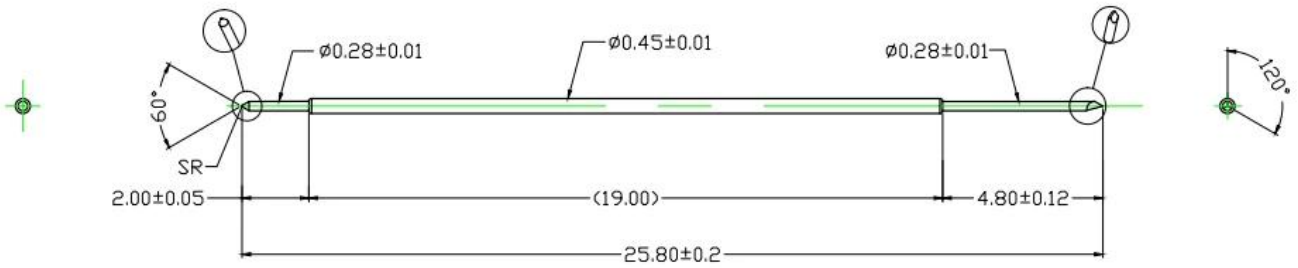

I nostri vantaggi:

1.we have 30 years experience in probe pin and have ourself factory.

2.we provide free sample and have a testing depa rtment.

3.we could manufacture products as your request.

4.we guarantee best price and good service.

Il nostro prodotto principale:

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semic onductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ a nd VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig loc ks, POM, Iron hinge etc

Attrezzatura di prova:

Spring exhausted tester	DC power supply	Current resistance tester
Microscope	Tensile strength tester	Spring tester

Pacchetto:

胜蜂电子