

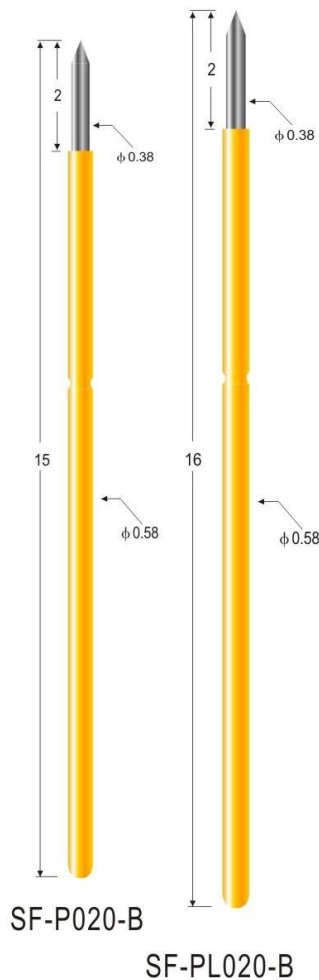



□□□□

□□□□	SFENG
ITERM□□	SF-P020
□□□	□□□□
□□□□□□	□□□□□□□□7□□□


SF-P020

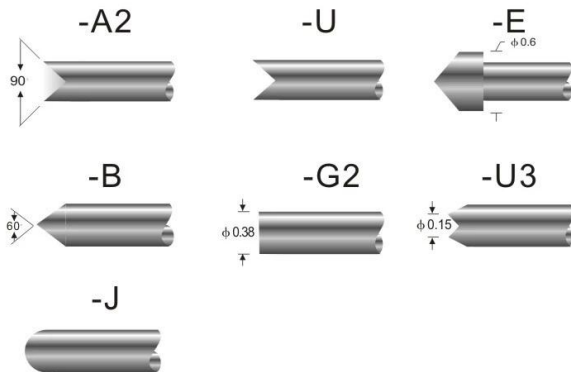


SF-R020-VR



SF-R020-VRW



SF-RL020-VR

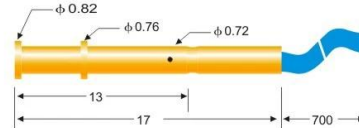

SF-RL020-VRW

Probe specifications SF-P020 PL020 (技术规格)

- Recommended minimum center(最小间距): 1.0mm(.0394 ")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,
Gold plated

SF-P020-J



SF-P020-B

SFENG
The China's The World's



www.chinapogopinsupplier.com

服務項目

1. 承接各種規格之筆類 24小時服務熱線
2. 承接各種規格之筆類 OEM/ODM服務
3. 承接各種規格之筆類 批發零售服務
4. 承接各種規格之筆類 批發零售服務

產品

PCB、ICT、FCT、各種規格之筆類、各種規格之筆類

□□□□□□

