



□□□□□

□□□□	SFENG
□□□□	100mil□□□□□□□□□□□□
□□□□	SF-PA100
□□□□□□	Cu□□/□□□□□□□□
□	□□□□□□□
□	□□□□□□
□□□	2N□7.2□□□□□
MOQ	100□

# SF-P100

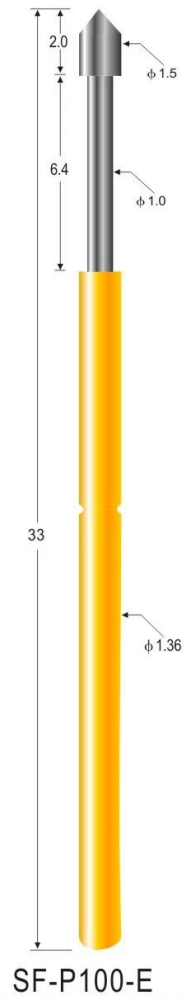


SF-P100-E

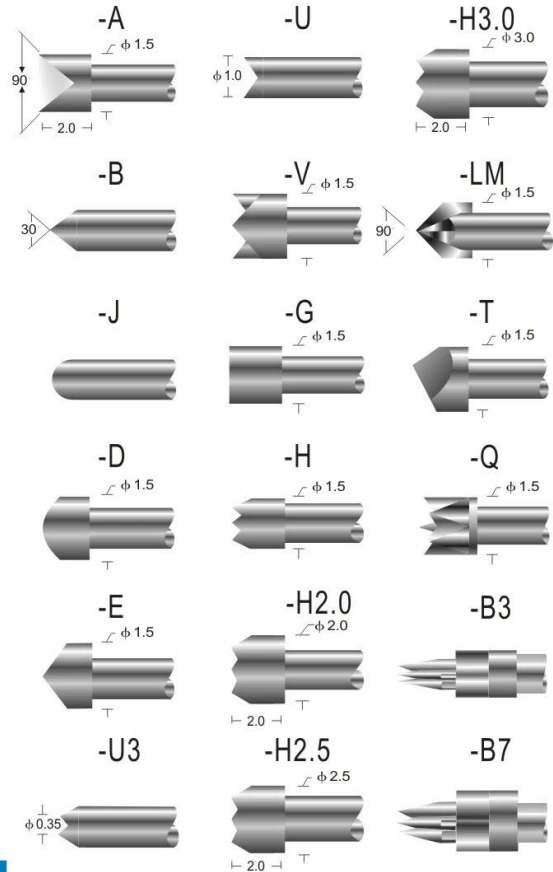

## Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000 ")
- Mounting hole size(钻孔尺寸):  
压克力: 1.70mm(.0670 ")  
电木板、玻璃纤维板: 1.75mm(.0689 ")
- Full travel(行程): 6.40(.2520 ")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated; SK4, Rh plated  
Barrel: Brass, Gold plated  
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)



# SFENG

The China's The World's



# SFENG

The China's The World's



**SFENG**  
The China's The World's





## 公司优势

1. 24小时在线客服
2. 提供OEM服务
3. 提供定制服务
4. 提供技术支持

## 应用领域

PCB、ICT、FCT、Pogo、BGA、QZ、VZ、LM、&

30 OK POM

□□□□



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products




6. Packing

□□□□



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope

□□□□□ & □□

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

