

- 产品系列SF-P030

ICT产品系列SF-P030

ICT产品系列PCB


产品

SuzhouShengyiyi Electronic Technology Co., Ltd. 1984
301515 I S O 9 0 0 0 1


2010
PCB ICT SMT IC




产品系列SF-P030




SF-R030-VR

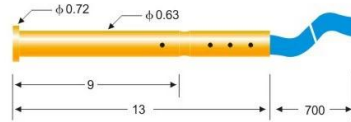





SF-R030-VRW




SF-RL030-VR

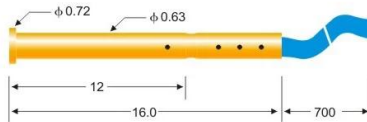

SF-RL030-VRW

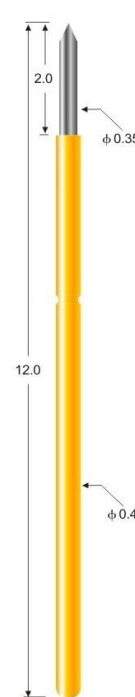

SF-P030-B



SF-PL030-B

Probe specifications SF-P030 PL030(技术规格)

- Recommended minimum center(最小间距): 0.90m(.0354 ")
- Mounting hole size(钻孔尺寸): 0.65mm(.0256 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 60g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 150mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,
Gold plated


Noted: Specifications subject to change without notice(注: 规格变动不另行通知)

2. pogo tester

3. Thermal chamber

4. Vibration table

Measuring Equipment >



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test