



SFENG
The China's The World's

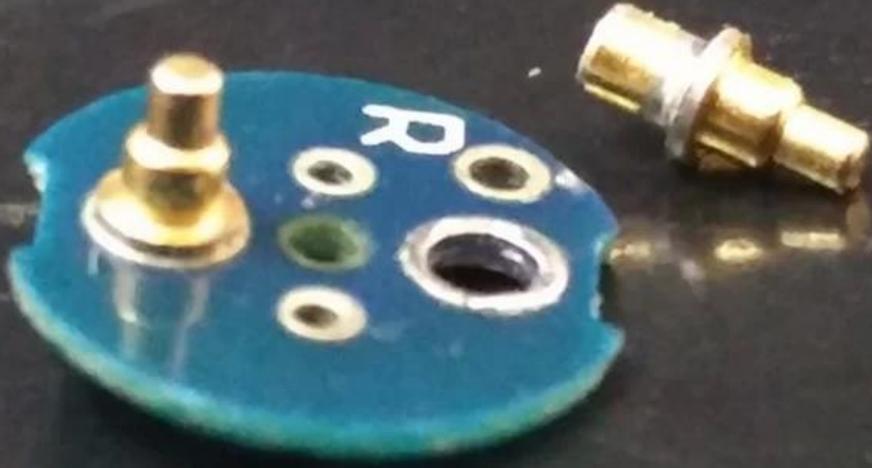

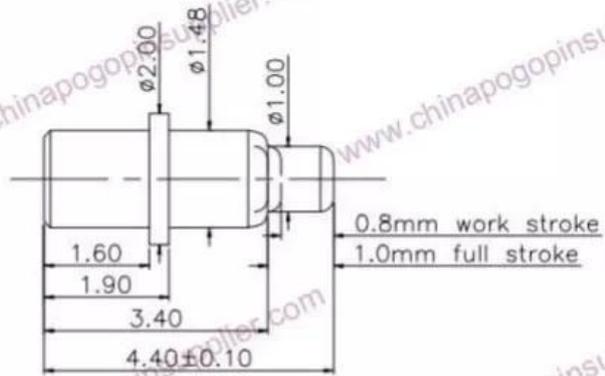

NOTE:

1. Material

Plunger: Brass C3604

Barrel: Brass C3604

Spring: SUS 304

2. Plating

10micro inch minimum Au over 60-100micro inch nickel

3. Electrical

Rated current & voltage: 24V 2A (PEAK 3A)

Contact resistance: 100mohm maximum at working height (quiescence)

4. Mechanical

Single pin spring force: $150 \pm 20\%$ g at normal working height

Durability: 10000 cycles minimum

5. To ensure the best usage, please operate it based on the working height

6. RoHS and HF compliant product



SFENG 有限公司 公告

Shengyifurui 有限公司 公告 & 有限公司 公告
有限公司 公告 ISO9001 - 2008 有限公司 公告 RoHs 有限公司 公告

有限公司

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester



□□□□□□

