





SFENG 1984 本公司代理之 SFENG () 系列之探针，
 其规格如下：
 规格

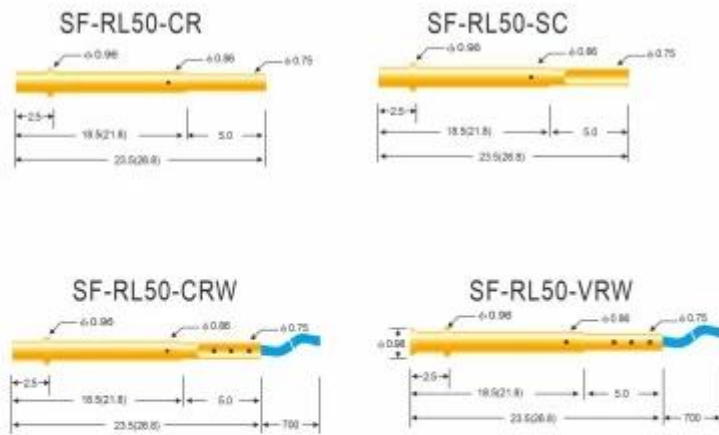

技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	1.27mm(.0500 ")
Mounting hole size 钻孔尺寸	V: 0.90mm(.0354 ") W: 0.95mm(.0374 ")
Full travel 行程	4.20(.1654 ")
Spring force 弹簧压力	120g(克)
Materials and finishes 材料及涂饰	Plunger:SK4, Ni or Au plated BeCu, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications
 Materials and finishes: Phosphor bronze,Gold plated

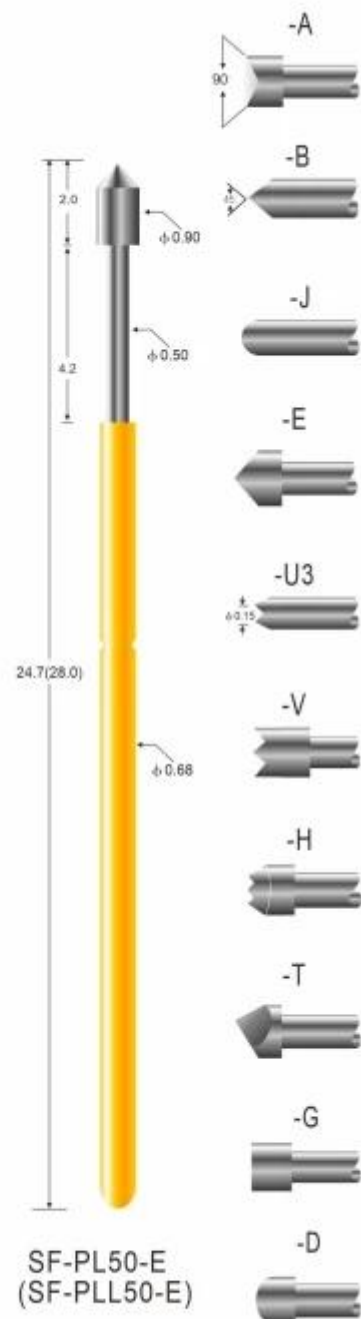

物料名称	SF-PL50
规格	1*27mm*0.0500"
公差	V:0.90mm*0.0354" W:0.95mm*0.0374"
重量	4.20*1.654g
数量	120g
材料	铜钌CuRh; SK4Rh 钨钨 钨钨
电流	3A
电阻	50mΩ
MOQ	100
备注	物料名称*7

物料名称

- 物料名称*24
- 物料名称*OEM
- 物料名称
- 物料名称

物料名称

- PCB ICT FCT
- 物料名称*2
- BGA
- 物料名称*QZ*VZ*LM
- 物料名称
- 物料名称/
- 物料名称*30# OK

物料名称*7

物料名称



□□□□



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop




4. Quality inspection




5. Finished products



6. Packing



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Q1. 請說明...

A1: ...

Q2. 請說明...

A2: ... QC ... 1 ...

Q3. 請說明...

A3: ...

Q4. 請說明...

A4: ...

Q5. 請說明...

A5: ...

Q6. 請說明...

A6: ...

Q7. OEM與ODM的區別?

A7: ... OEM / ODM ... P ...

Q8. 請說明...

A8: T/T ... L/C ... MOQ ...

請說明...

請說明 DHL, UPS, FedEx, TNT, EMS ...

請說明 Exwork, FOB, CNF, CIF ...



2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe









□□□□□□



CIBF2021

苏州胜亿福睿电子科技有限公司
Suzhou Shengyifurui Electronic Technology Co., Ltd

No.3B013

