




□□□□

□□□□	SFENG
□□□□	SF-P160
□□□□□□	□□□□□□□□□□□□□□ Ni□□□□□□□□□□
□□□□□□	□□□□□□□□□□7□□□

□□□□



SF-P160

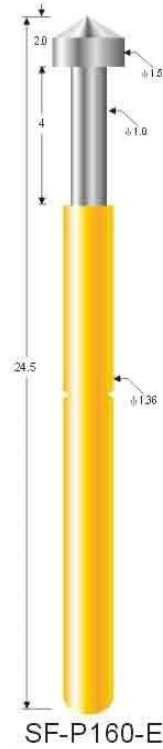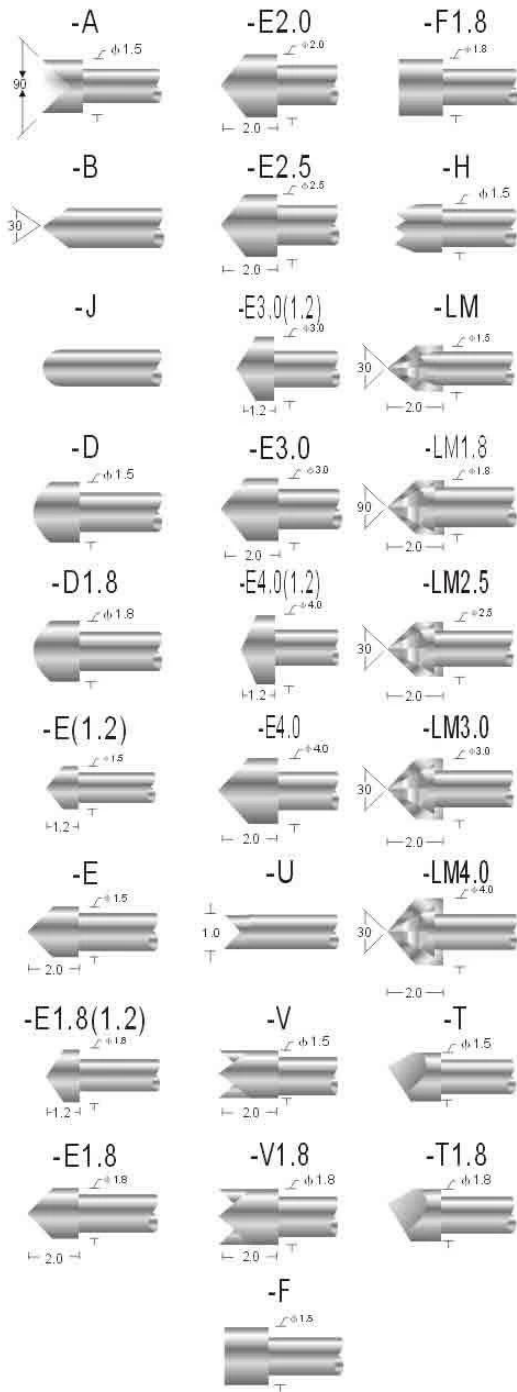

Probe specifications SF-P160(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000 ")
- Mounting hole size(钻孔尺寸):
 压克力: 1.70mm(.0670 ")
 电木板、玻璃纤维板: 1.75mm(.0689 ")
- Full travel(行程): 4.0(.1575 ")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
 Plunger: Be Cu, Rh plated; SK4, Rh plated
 Barrel: Brass, Gold plated
 Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ (毫欧姆)

1. 24
2. OEM
- 3.
- 4.

□□□□

PCB ICT FCT

2 & 038;






BGA

QZ VZ LM

& 038; /

30 OK POM

□□□□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□□□□□

