



技术规格 PROBE SPECIFICATIONS

| | |
|------------------------------------|--|
| Recommended minimum center 最小间距 | 1.27mm(.0500 ") |
| Mounting hole size 钻孔尺寸 | V: 0.90mm(.0354 ") W: 0.95mm(.0374 ") |
| Full travel 行程 | 2.5(.0984 ") |
| Spring force 弹簧压力 | 100g(克) |
| Materials and finishes 材料及涂饰 | Plunger:SK4, Ni or Au plated BeCu, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel |
| Current rration 额定电流 | 1.5A(安培) |
| Contact resistance 接触电阻 | 50mΩ(毫欧姆) |

Receptacle specifications
Materials and finishes: Phosphor bronze,Gold plated

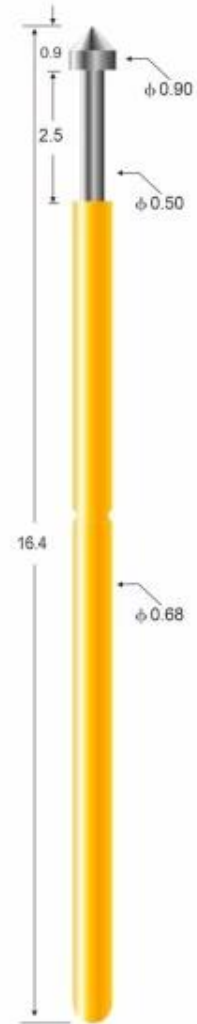


SF-P50-E

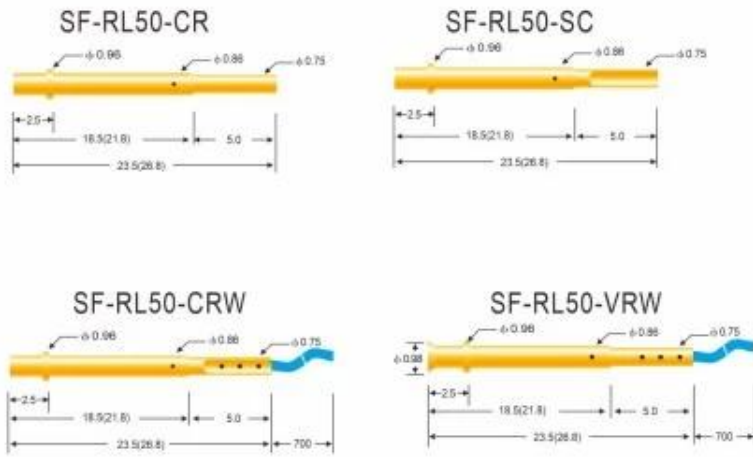

技术规格 PROBE SPECIFICATIONS

| | |
|------------------------------------|--|
| Recommended minimum center 最小间距 | 1.27mm(.0500 ") |
| Mounting hole size 钻孔尺寸 | V: 0.90mm(.0354 ") W: 0.95mm(.0374 ") |
| Full travel 行程 | 4.20(.1654 ") |
| Spring force 弹簧压力 | 120g(克) |
| Materials and finishes 材料及涂饰 | Plunger:SK4, Ni or Au plated BeCu, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel |
| Current ration 额定电流 | 3A(安培) |
| Contact resistance 接触电阻 | 50mΩ(毫欧姆) |

Receptacle specifications
Materials and finishes: Phosphor bronze,Gold plated

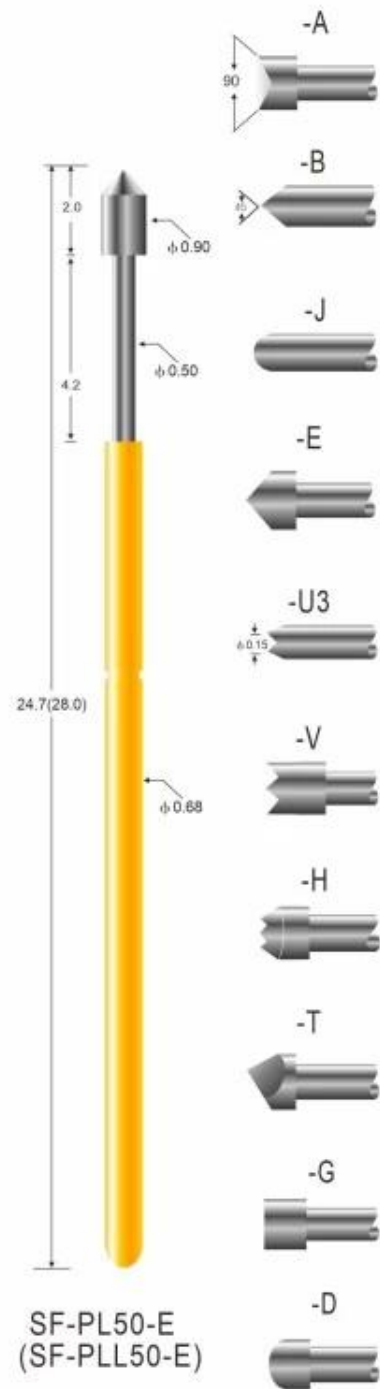

1. 24
2. OEM
- 3.
- 4.



1. PCB ICT FCT
2. 2
3. BGA
4. QZ VZ LM
- 5.
- 6.
7. 30# OK POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



