


□□□□□□


SFENG 1984 精密探针系列 (ICT FCT) 精密探针系列

□□□□□


SF-PH15-B3

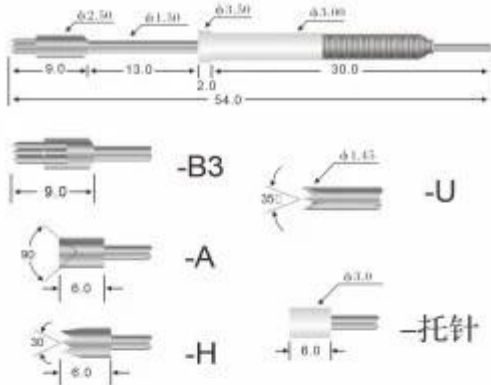


SF-PH18-B3

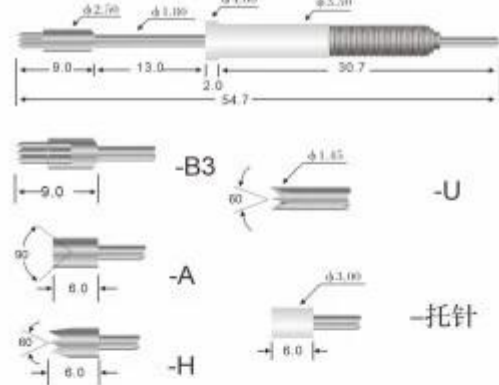

SF-PH101-B3

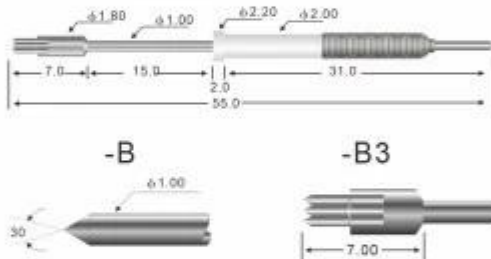

SF-PM200-B3

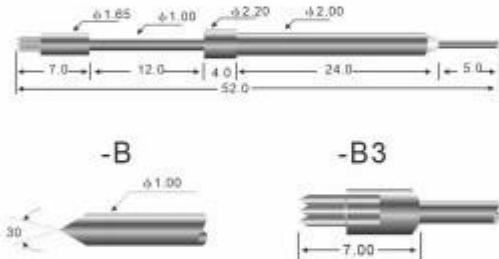

技术规格

PROBE SPECIFICATIONS

	SF-PH15	SF-PH18	SF-PH101	SF-PM200
Recommended minimum center 最小间距	3.50mm(.1378 ")	4.30mm(.1693 ")	2.54mm(.1000 ")	2.54mm(.1000 ")
Mounting hole size 钻孔尺寸	3.00mm(.1181 ")	3.50mm(.1378 ")	2.00mm(.0787 ")	2.00mm(.0787 ")
Full travel 行程	13.0(.5118 ")	13.0(.5118 ")	15.0(.5905 ")	12.0(.4724 ")
Spring force 弹簧压力	300g	300g	300g	300g
Current rating 额定电流	5A(安培)	5A(安培)	5A(安培)	5A(安培)
Contact resistance 接触电阻	50m Ω (毫欧姆)	50m Ω (毫欧姆)	50m Ω (毫欧姆)	50m Ω (毫欧姆)

□□□□□□:

品名	SF-PM200
尺寸	254mm×1000
厚度	2.00mm×.0787
重量	12.0×.4724
数量	300
电压	5A
电阻	50mΩ
MOQ	100
备注	7

规格

1. 24
2. OEM
- 3.
- 4.

材料

1. PCB ICT FCT
2. 2 ()
3. BGA
4. QZ VZ LM
- 5.
6. /
7. 30# OK POM

备注





1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Q1. 請說明...

A1: ...

Q2. 請說明...

A2: ... QC ... 1 ...

Q3. 請說明...

A3: ...

Q4. 請說明...

A4: ...

Q5. 請說明...

A5: ...

Q6. 請說明...

A6: ...

Q7. OEM與ODM的區別?

A7: ... OEM /ODM ... P ...

Q8. 請說明...

A8: T/T ... L/C ... MOQ ...

請說明...

請說明 DHL UPS FedEx TNT EMS ...

請說明 Exwork FOB CNF CIF ...



2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe









□□□□□□



CIBF2021

苏州胜亿福睿电子科技有限公司
Suzhou Shengyifurui Electronic Technology Co., Ltd

No.3B013

