


□□□□

□□□□	SFENG
□□□□	SF P058 B
□□□□	Ni □□□□□□□□
□□□□ □□□□	□□□□□□□□□□ 7 □□□□

□□□□□□

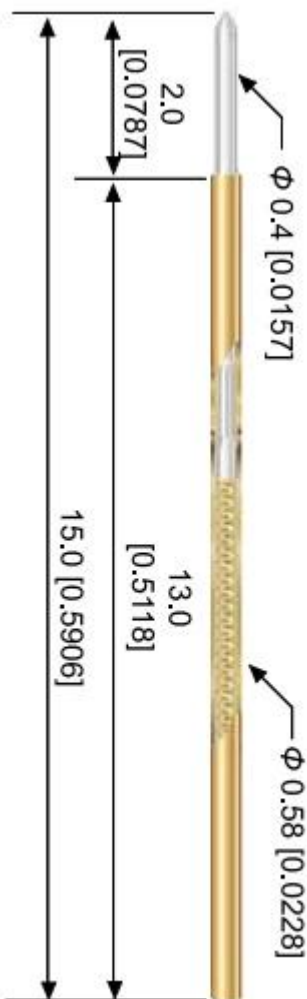

- 針軸 Plunger
- 高碳鋼鍍金
- SK4 with Gold Plated
- 內管 Barrel
- 磷青銅鍍金
- Phosphor Bronze with Gold Plated
- 彈簧 Spring
- 琴鋼線鍍金
- Music Wire with Gold Plated
- 外管 Receptacle
- 磷青銅鍍金
- Phosphor Bronze with Gold Plated
- 最小中心距 Min. Pitch
- 1.0mm [0.0394]
- 彈力最大行程
- Spring Force @ Full Stroke
- 60g[2.12 oz]±20% @ 2.0mm[0.079]
- 2/3彈力行程
- Spring Force @ 2/3 Stroke
- 45g[1.59 oz]±20%
- 額定電流 Current Rating
- 1A Continuous
- 接觸阻值 Contact Resistance
- 150 mΩ

□□□□□□□□

2. 000000 000000OEM 0000000000
3. 00 00000000000000 0000000000000000000000000000000000
4. 00 00000000000000 0000000000000000000000000000000000

0000

000000000000ICT(0000) 0 FCT 000000

0000 (0000) 0000000000000000000000000000000000 2 0000000000000000000000000000000000

0000000000 BGA 0000000000;







0000000000 000QZVZ 0000; LM 000000000000

00000000000000 0000000000;

000000 0 000000/socket;

00000000000030 # [ok] 000000000000POM00000000

0000000000

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

