


0000

0000	SFENG
0000	SF-P020-B
000000	0000000000000000Ni000
000	0000000Ni000
0	SK400000
000000	80000
0000	2.000000
00000	1A
00000	120mΩ
000	1.000000
000000	0.7500000
MOQ	100
000000	7 000000000000

00000

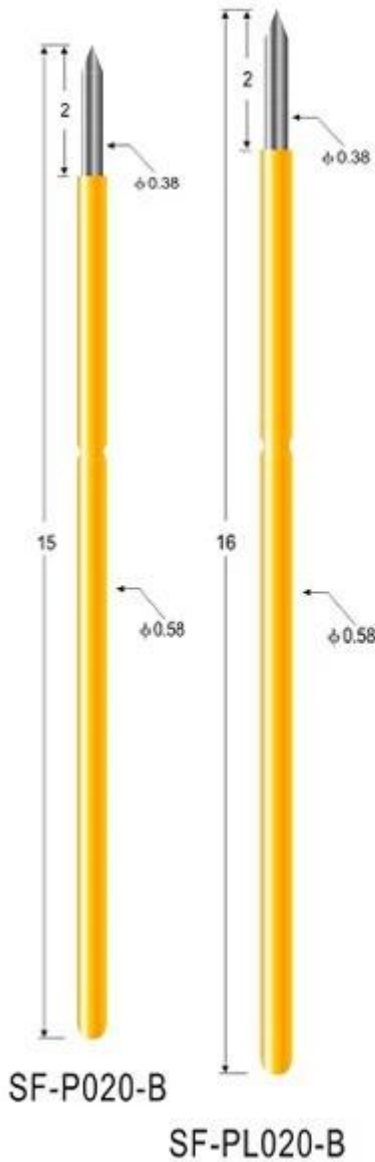

Probe specifications SF-P020 PL020 (

- Recommended minimum center(最小间距): 1.0mm(.0394 ")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current rating(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze, Gold plated



chinapogopinsupplier.com

□□□□□□

- 1.Reply 24□□□□withn□□□□□□
- 2.Customized □□□□□□OEM□□□□□□□□
- 3.Delivery □□□□□□□□□□□□□□□□
- 4.provide □□□□□□□□□□□□□□

□□□□

- PCB□ICT□FCT□□□□□□□□□□□□
- usuallytemporary□□□□□□□□□□□□□□
- &□□□□□□□□□□□□□□□□□□

