


□□□□

□□□□	SF5797
□□□□□□□□	5.0mm
□□□□□□□□	4.0mm
□□□□	300±20%gf@10□□ 4.0mm
□□□□□□□□□□	1.5±0.2mm
□□□□□□□□	BeCu, □□□□□□□□□□□□□□□□
□□	PH □□□□□□□□□□□□□□□□
□□□□	BeCu, □□□□□□□□□□□□□□□□
□	SWP
□□□□□□□□□□	OEM □□& □□□□ ODM
MOQ	100□
□□□□□□	□□□□□□□□□□□□
□□□□	□□□□ 100% T/Tbing
□□	5-10 □ □□□□□□□□□□□ □ □□□

□□ □□□□□□

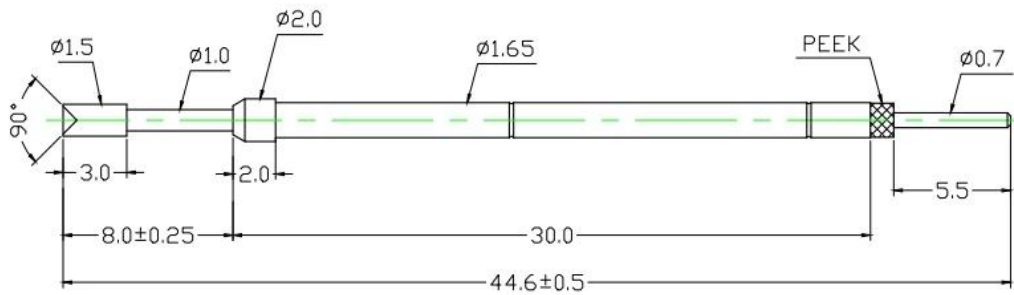

Specifications (技術要求) :

- Full Stroke (滿冲程) : 5.0mm
- Rated Stroke (額定冲程) : 4.0mm
- Spring Force (額定彈力) : 300±20%gf@ load 4.0mm
- Switching Path (开关距离) : 1.5±0.2mm

Materials (plated) (材質與鍍層) :

- Barrel (針套) : Ph (磷銅) , Au on Ni Plated
- Plunger (針軸) : BeCu (鍍銅) , Au on Ni Plated
- Tail pin(尾針) : BeCu (鍍銅) , Au on Ni Plated
- Spring (彈弓) : SWP (琴線) , Au on Ni Plated

□□ □□□□



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



Measuring Equipment >



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test



