


**SFENG 1984 系列 0.4mm 间距 5 针 D 型 针座 (PCB 板安装)**

SFENG 1984 系列 0.4mm 间距 5 针 D 型 针座 (PCB 板安装) 是一种用于连接 PCB 板上 0.4mm 间距的 5 针 D 型接插件的精密连接器。该针座采用优质材料制造，具有优异的电气性能和机械强度，广泛应用于各种电子设备中。

**规格参数**

本针座符合 IPC-6103 标准，所有尺寸单位为 mm。额定冲程为 10.00mm，额定弹力为 350±70gf @ 10.00mm 行程。

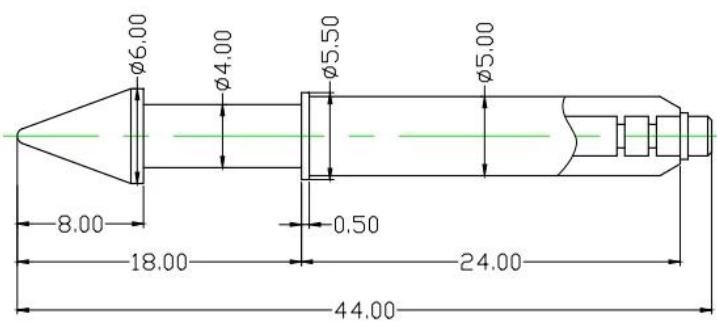

Materials(Plated) (材質與鍍層):  
 Barrel(針套) : Brass(黃銅) , Ni Plated  
 Plunger(針軸) : Fe(鐵) , Ni Plated  
 Spring(彈弓) : SUS (不銹鋼線) , /

Specifications (技術要求):  
 Rated Stroke(額定沖程) : 10.00mm  
 Spring Force(額定彈力) : 350±70gf @ load 10.00mm

				名称: SF-GP5.0X44(帶帽)-鐵				胜峰科技			
								说明: 1. 所有尺寸单位为mm 2. 未注图示尺寸公差:按GB1804-79 11级精度执行			
设计	处数	更改文件号	签字	日期	图样	标记	视图	质量	比例	图纸编号:	
校核			标准		S	A	⊕		1:1		
审核			制图	HJQ	共 1 页		第 1 页				
工艺			日期	2023-5-18							

**规格参数表**

系列	SF-GP5.0X44
间距	0.4mm
针数	5
额定冲程	10.00mm
额定弹力	350±70gf @ 10.00mm
材料	70/10





1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope







2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe











□□□□□□





CIBF2021

苏州胜亿福睿电子科技有限公司  
Suzhou Shengyifurui Electronic Technology Co., Ltd

No.3B013

