

□□□□




□□□□	SFENG
□□□□	□□□□□□SF-P125-H
□□□	Ni□□□□□□□□□□
□□□□□□	□□□□□□□□□□7□□□

□□□□

**胜峰探针**  
**SFENG**  
The China's The World's

**RoHS** **ISO 9001** **CE**




[chinapogopinsupplier.com](http://chinapogopinsupplier.com)

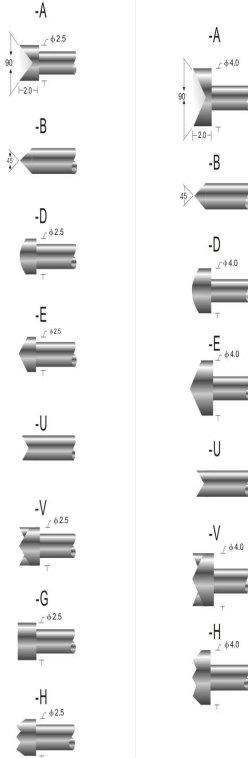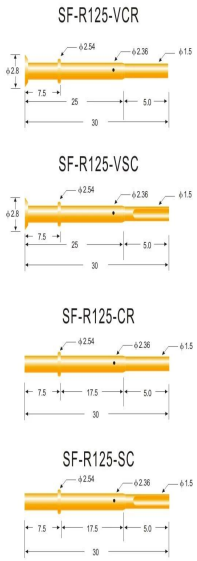

Probe specifications SF-P125(技术规格)

- Recommended minimum center(最小间距): 3.17mm(.1248")
- Mounting hole size(钻孔尺寸): 压克力: 2.40mm(.0945") 电木板、玻璃纤维板: 2.45mm(.0965")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰): Plunger: Be Cu, Rh plated; Barrel: Brass, Gold plated; Spring: Stainless steel
- Current ration(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式): Crimp: R125-VCR, R125-CR; Solder cup: R125-VSC, R125-SC

Noted: Specifications subject to change without notice(注: 规格变动不另行通知)

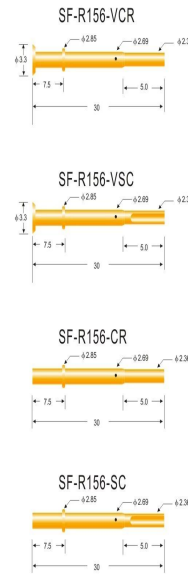

Probe specifications SF-P156(技术规格)

- Recommended minimum center(最小间距): 4.75mm(.1870")
- Mounting hole size(钻孔尺寸): 压克力: 2.75mm(.1083") 电木板、玻璃纤维板: 2.80mm(.1102")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 250g
- Materials and finishes(材料及涂饰): Plunger: Be Cu, Rh plated; Barrel: Brass, Gold plated; Spring: Stainless steel
- Current ration(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式): Crimp: R156-VCR, R156-CR; Solder cup: R156-VSC, R156-SC

Noted: Specifications subject to change without notice(注: 规格变动不另行通知)



1. 24
2. OEM
- 3.
- 4.



- PCB ICT FCT
2. &
  - BGA

