

0000

|        |                     |
|--------|---------------------|
| 0000   | SFENG               |
| 0000   | SF-P020-J           |
| 000000 | 00000000000000Ni000 |
| 00     | 0000000Ni000        |
| 0      | SK400000            |
| 000000 | 80000               |
| 000    | 2.0000000           |
| 00000  | 1A                  |
| 00000  | 120mΩ               |
| 000    | 1.0000000           |
| 000000 | 0.75000000          |
| MOQ    | 1000                |
| 000000 | 00000000007000      |

00000


胜峰探针  
**SFENG**  
The China's The World's

RoHS

QUALITY ASSURED FIRM  
**ISO 9001**  
SGS

CE

chinapogopinsupplier.com

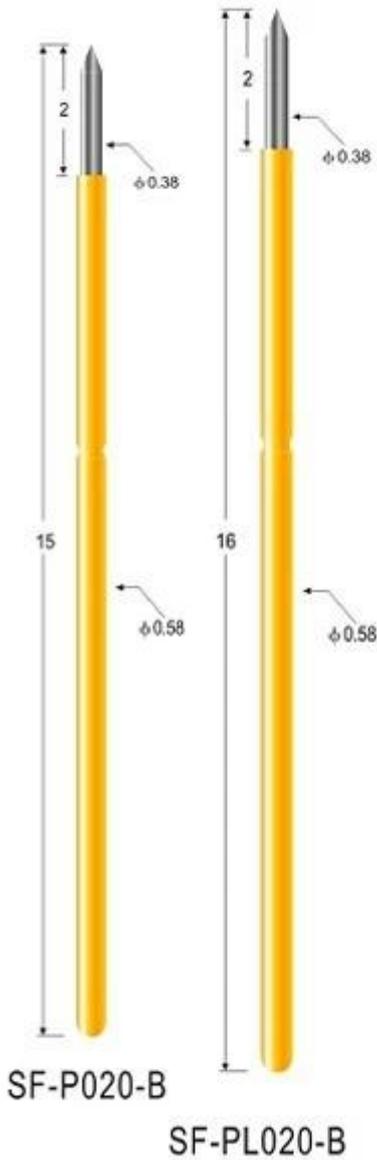

### Probe specifications SF-P020 PL020 (插)

- Recommended minimum center(最小间距): 1.0mm(.0394 ")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):  
Plunger:SK4,Rh plated  
Barrel:Phosphor bronze,Gold plated  
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

#### Receptacle specifications

Materials and finishes: Phosphor bronze, Gold plated

□□□□□□

24□□□□withn□□□□□□1.Reply

2.Customized□□□□□□OEM□□□□□□□□

□□□□□□□□□□□□□□□□□□3.Delivery

□□□□□□□□□□□□□□□□4.provide

□□□□

PCB□ICT□FCT□□□□□□□□□□---□□□□□□□□□□

□□usuallytemporary□□□□□□□□---□□□□□□□□□□

□□□□□□□□2□□□□□□□□□□□□□□□□□&□038;



