


品名


品名	SFENG
品名	SF-P080
品名	品名
品名	品名
品名	品名
品名	15mm
品名	1.5mm0.0590 "mm
品名	0.3A
品名	260mmmmW
品名	0.45mm0.0177 "mm
品名	0.35mm0.0138 "mm
MOQ	100 件
品名	7 件mmmmmmmmmmmm

品名


SF-P080




-J

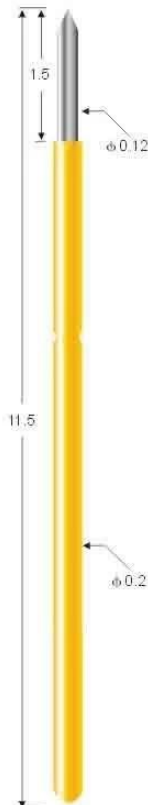

SF-P080-B



SF-R080-VR

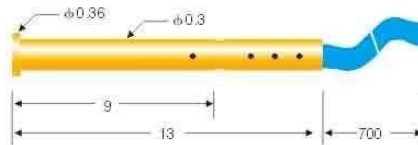

SF-R080-VRW

Probe specifications SF-P080(技术规格)

- Recommended minimum center(最小间距): 0.45mm(.0177 ")
- Mounting hole size(钻孔尺寸): 0.35mm(.0138 ")
- Full travel(行程): 1.5(.0590 ")
- Spring force(弹簧压力): 15g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current ration(额定电流): 0.3A(安培)
- Contact resistance(接触电阻): 260mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze, Gold plated



chinapogopinsupplier.com

公司简介

1. 专业生产各种规格探针 24 小时服务热线
2. 专业生产各种规格探针 OEM 服务
3. 专业生产各种规格探针 各种规格探针
4. 专业生产各种规格探针 各种规格探针

产品

PCB ICT FCT 各种规格探针

各种规格探针 24 小时服务热线 & 各种规格探针

BGA 各种规格探针

QZVZLM

;

&038; /

30OKPOM

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

