




- PCB 0000000000 PL030-J 000 0000




SF-R030-VR

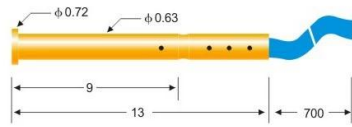


SF-R030-VRW



SF-RL030-VR

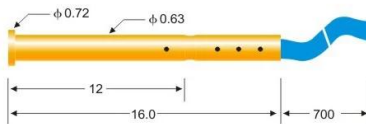

SF-RL030-VRW



-B




-U3



-J




-U




-E




-G2



-T

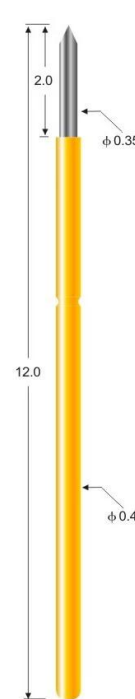

SF-P030-B

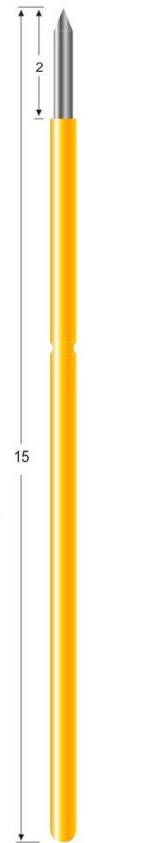

SF-PL030-B

Probe specifications SF-P030 PL030(技术规格)

- Recommended minimum center(最小间距): 0.90m(.0354 ")
- Mounting hole size(钻孔尺寸): 0.65mm(.0256 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 60g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 150m Ω (毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,
Gold plated

Noted: Specifications subject to change without notice(注: 规格变动不另行通知)

-6-

ICT PCB 30 15 ISO 9001

2010

Suzhou Shengyifurui Electronic Technology Co., Ltd 1984 30 15 ISO 9001

2010 PCB ICT SMT IC

Production Flow (生产流程) **SFENG**
The Choice. The World.

1. raw material warehouse
2. Lathe workshop
3. Assemble workshop
4. Quality inspection
5. Finished products
6. Packing




1. PCB ICT FCT

2.

3.

4.

Measuring Equipment >



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test