





SFENG 1984 零件名稱: SF-P111 (零件規格: 1.90mm x 0.0748")



零件名稱	SF-P111
零件規格	1.90mm x 0.0748"
零件圖號	零件圖號: 1.35mm x 0.0532" 零件圖號: 1.40mm x 0.0551"
零件數量	6.3 x 2481 個
重量	120g
零件材料	零件材料: Cu/Rh 零件材料: 零件材料:
零件公差	3A
零件阻值	50mΩ
MOQ	100
零件圖號	零件圖號: 7



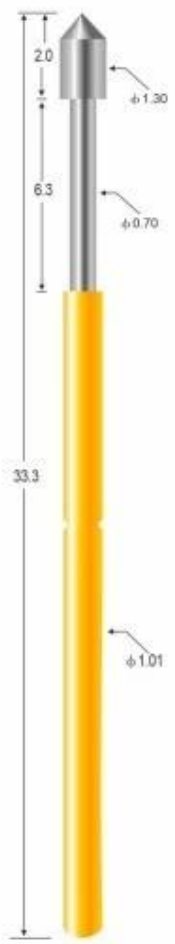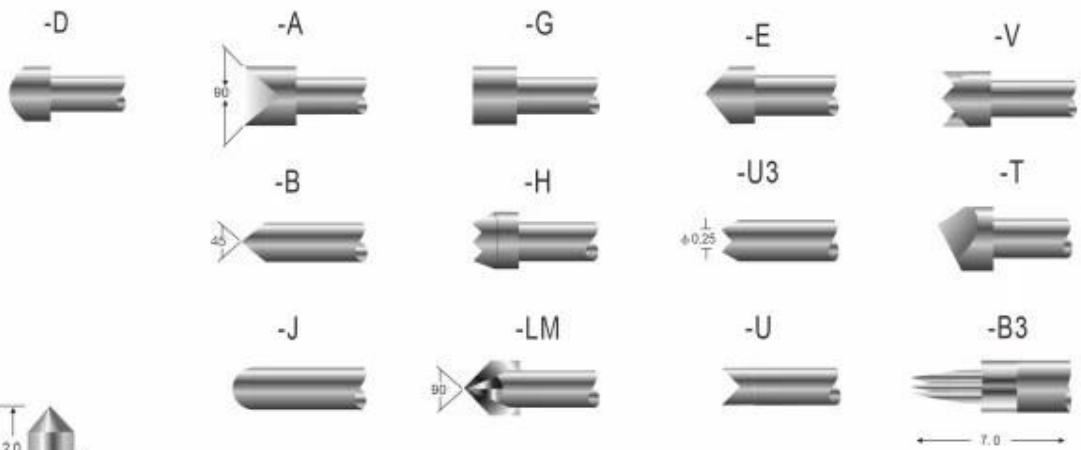

SF-P111-E


技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	1.90mm(.0748 ")
Mounting hole size 钻孔尺寸	压克力: 1.35mm(.0532 ") 电木板、玻璃纤维板: 1.40mm(.0551 ")
Full travel 行程	6.3(.2481 ")
Spring force 弹簧压力	120g(克)
Materials and finishes 材料及涂饰	Plunger:SK4, Ni or Au plated BeCu, Ni or Au plated Phosphor bronze, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)







Receptacle specifications
Materials and finishes: Phosphor bronze,Gold plated

技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	1.90mm(.0748")
Mounting hole size 钻孔尺寸	压克力: 1.35mm(.0532") 电木板、玻璃纤维板: 1.40mm(.0551")
Materials and finishes 材料及涂饰	Barrel: Brass, Au plated
Connections 接线形式	Crimp: R111-VCR2.5, R111-CR Solder cup: R111-VSC2.5, R111-SC Wire wrap: R111-VW2.5, R111-WW2.5, R111-WW Terminal:

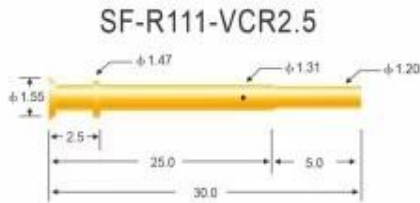

Receptacle specifications
Materials and finishes: Phosphor bronze, Gold plated

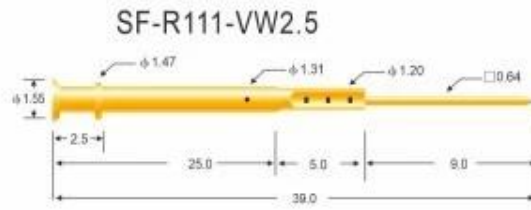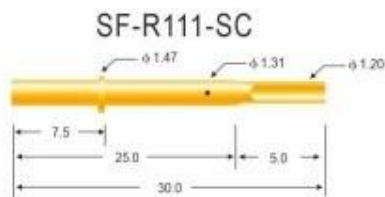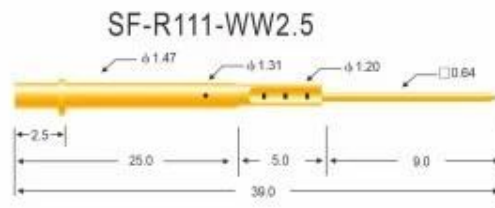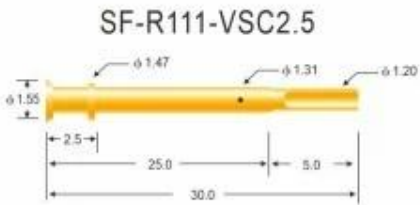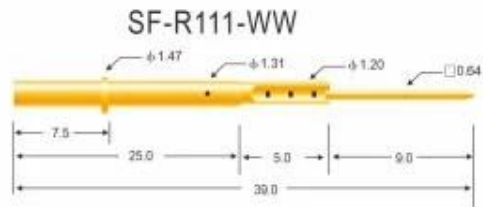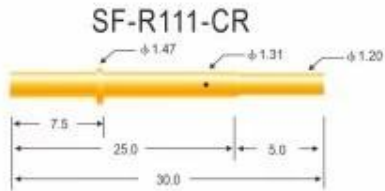

1. 24-pin probe
2. OEM probe
3. Probe
4. Probe



1. PCB ICT FCT
2. 2
3. BGA
4. QZ VZ LM
- 5.
- 6.
7. 30# OK POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



