

□□□□

□□□□	SF-P156-H
□□□	4.75mm
□□□□□□□□	□□□□□□□□□□:2.75mm □□□□□□□□□□:2.80mm
□□□□□□□□	4.5mm
□□□□□□□□	6.8mm
□□□	450gf@load 6.0mm
□□□□□	3A
□□□□	≤50mΩ
MOQ	100□
□□□	T/T
□□	□□□□□□□□□□ 5 □ 10 □

□□ □□□□□□

P156-H3.0

Materials(Plated) (材質與鍍層):

①Barrel(針套) : Brass(黃銅) , Au on Ni Plated

②Plunger(針軸) : Ph(磷銅) , Ni Plated

Spring(彈弓) : SUS304 (不鏽鋼線) , /

Specifications (技術要求):

Current Rating(額定電流) : 5A

Contact Resistance(接觸電阻) : 50mΩ

Full Stroke(滿沖程) : 6.8mm

Rated Stroke(額定沖程) : 4.5mm

Spring Force(彈力) : 450gf@ load 6.0mm




设计	标准化	图样标记	数量比例
校对	审定	S A	5:1
审核	制图	检验员	
工艺	日期	2016.06.20	

名稱

P156-H3.0

胜峰探针




说明: 1、所有尺寸的单位为mm
2、未注图示尺寸公差:
按GB1804-79 11级精度执行。

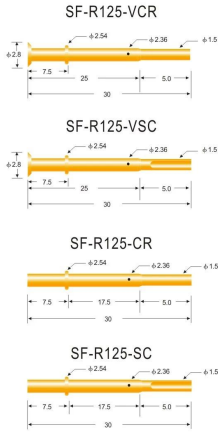

Probe specifications SF-P125(技术规格)

- Recommended minimum center(最小间距): 3.17mm(.1248")
- Mounting hole size(钻孔尺寸): 压克力: 2.40mm(.0945") 电木板、玻璃纤维板: 2.45mm(.0965")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰): Plunger: Be Cu, Rh plated; Barrel: Brass, Gold plated; Spring: Stainless steel
- Current rating(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式): Crimp: R125-VCR, R125-CR; Solder cup: R125-VSC, R125-SC

Noted: Specifications subject to change without notice(注: 规格变动不另行通知)

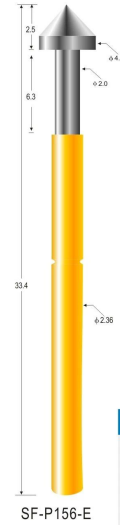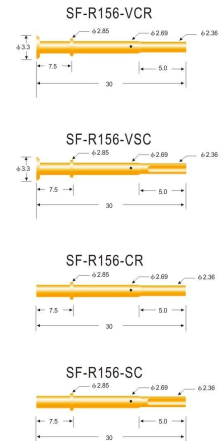

Probe specifications SF-P156(技术规格)

- Recommended minimum center(最小间距): 4.75mm(.1870")
- Mounting hole size(钻孔尺寸): 压克力: 2.75mm(.1083") 电木板、玻璃纤维板: 2.80mm(.1102")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 250g
- Materials and finishes(材料及涂饰): Plunger: Be Cu, Rh plated; Barrel: Brass, Gold plated; Spring: Stainless steel
- Current rating(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式): Crimp: R156-VCR, R156-CR; Solder cup: R156-VSC, R156-SC

Noted: Specifications subject to change without notice(注: 规格变动不另行通知)





1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing



Measuring Equipment >

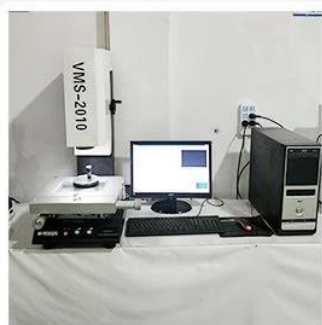

Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test



