
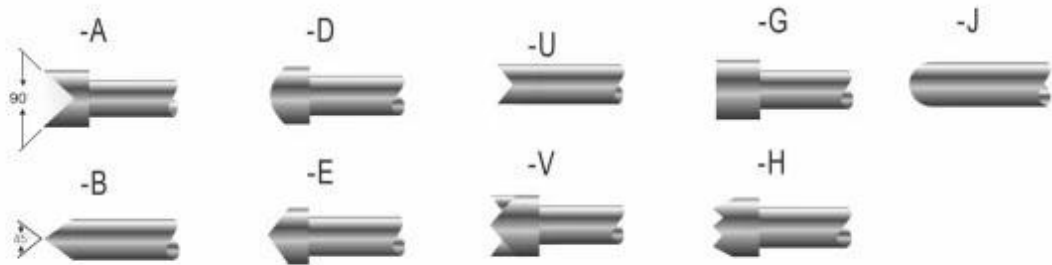
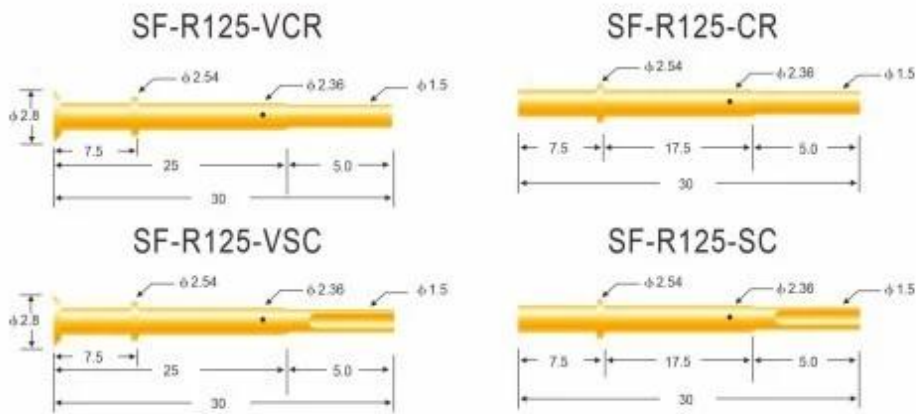


技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	3.17mm(.1248 ")
Mounting hole size 钻孔尺寸	压克力: 2.45mm(.0532 ") 电木板、玻璃纤维板: 1.40mm(.0551 ")
Full travel 行程	6.3(.2481 ")
Spring force 弹簧压力	120g(克)
Materials and finishes 材料及涂饰	Plunger: SK4, Ni or Au plated BeCu, Ni or Au plated Phosphor bronze, Ni or Au plated Barrel: Brass, Au plated Spring: Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications
Materials and finishes: Phosphor bronze, Gold plated

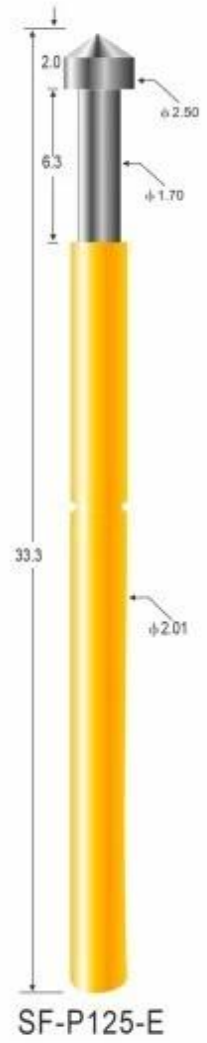

1. 24孔间距
2. OEM
- 3.
- 4.



1. PCB ICT FCT
2. 2
3. BGA
4. QZ VZ LM
- 5.
- 6.
7. 30# OK POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



