

□□□

□□□□	SFENG
□□	□□□□□□□□SFM100
□□□□□□	□□□□□□
□	□□
□	□□□□□□
□□□	□□□□□□□□
□□□□□	3.0mm
□□□□	□□
□□□□	□□
□□	□□
□□□□	□□
MOQ	100
□□	□□□□□□7□

□□□□















SFENG
The China's The World's



□□□□□□□□□□




SF-M100


可选用的针头形式				
材料	针头类型	针头 电镀	特殊版本	
			φ	φ (inch)
AU	A 	φ 1.5	A	
AU	B 	φ 0.45	A	
AU	B1 	φ 0.7	A	
AU	H 	φ 1.5	A	
AU	J 	φ 0.5	A	
AU	D 	φ 0.65	A	φ 1.0
AU	DG 	φ 1.0	A	
AU	J1 	φ 0.4	A	
AU	D2 	φ 0.6	A	
AU	G 	φ 1.0	A	φ 1.5
AU	V 	φ 1.5	N	
AU	T 	φ 1.5	N	

安装和功能的尺寸

M100

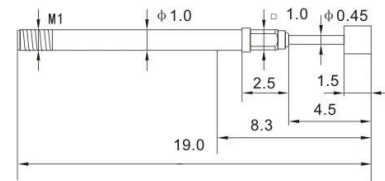

MR100

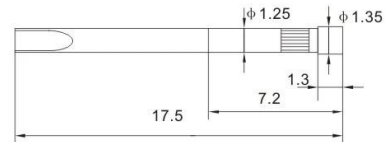

用来测试电缆束的探针
螺钉，螺丝 螺纹设计
可用的螺旋工具

技术参数

间距: 1.91 mm/75mil
全行程: 3.00 mm
工作行程: 2.40 mm
预装弹力: 0.20 N
在工作行程下的弹力: 0.8 N

电气数据

电流: 3.0 A
电阻: ≤20 mOhm

材质

针管: 黄铜，镀金
弹簧: 不锈钢
针杆: 铍铜，镀金
套管: 黄铜，镀金

推荐的钻孔直径


HP2361.1 (保温、隔热材料) 1.25 mm
HG2372 (玻璃钢，玻纤棉) 1.26 mm



1.□□□□□



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

