




SFENG 1984 产品系列 (ICT 产品系列) 产品规格表




产品型号	SF-PH-18
产品尺寸	4.30mm(.1693英寸)
产品重量	3.50mm(.1378英寸)
产品长度	13.0(5.118英寸)
产品宽度	300毫米
产品电流	5A
产品电阻	50mΩ
MOQ	100
产品材料	产品材料符合RoHS




SF-PH15-B3

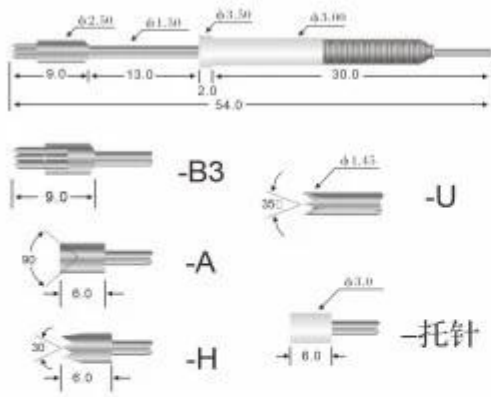


SF-PH18-B3

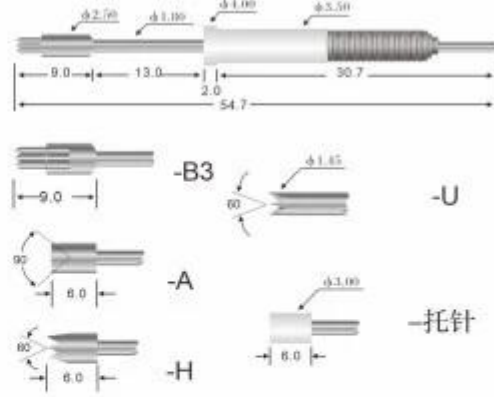

SF-PH101-B3

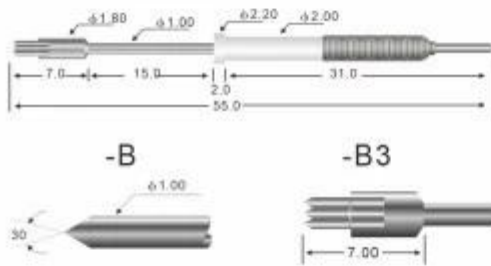

SF-PM200-B3

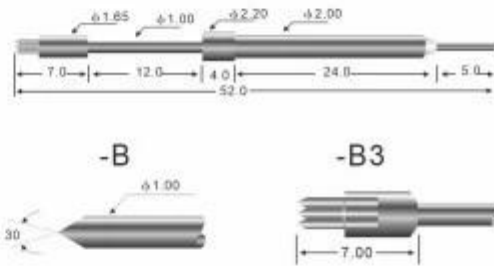

技术规格
PROBE SPECIFICATIONS

	SF-PH15	SF-PH18	SF-PH101	SF-PM200
Recommended min. contact 最小间距	3.50mm(.1378 ")	4.30mm(.1693 ")	2.54mm(.1000 ")	2.54mm(.1000 ")
Mounting hole size 钻孔尺寸	3.00mm(.1181 ")	3.50mm(.1378 ")	2.00mm(.0787 ")	2.00mm(.0787 ")
Full travel 行程	13.0(.5118 ")	13.0(.5118 ")	15.0(.5905 ")	12.0(.4724 ")
Spring force 弹簧压力	300g	300g	300g	300g
Current rating 额定电流	5A(安培)	5A(安培)	5A(安培)	5A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)	50mΩ(毫欧姆)	50mΩ(毫欧姆)	50mΩ(毫欧姆)



1. 24mm 间距
2. OEM 定制
3. 定制
4. 定制



1. PCB ICT FCT
2. 2
3. BGA
4. QZ VZ LM
- 5.
- 6.
7. 30# OK POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing





1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe



Exwork, FOB, CNF, CIF, DHL, UPS, FedEx, TNT, EMS

Exwork, FOB, CNF, CIF

