


□□□□

□□□□	SFENG
□□□□	SF-P100-J
□□□□□□	□□
□□	□□
□	SUS□□□□□□□□□□□□
□□□	200g
□□□□□□	6.40(0.2520"")
□□□□□□	3A
□□□□	W
□□□	2.54(0.1000"")
□□□□□□	1.70(0.0670"")/1.75(0.0689"")
MOQ	100□
□□□□□□	□□□□□□□□□□□□7□□□

□□□□

SF-P100

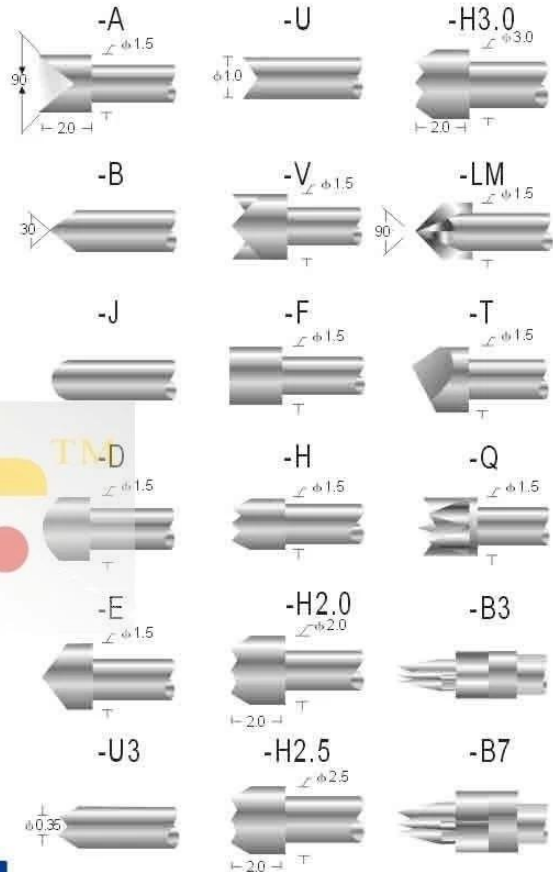

Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000")
- Mounting hole size(钻孔尺寸):
压克力: 1.70mm(.0670")
电木板、玻璃纤维板: 1.75mm(.0689")
- Full travel(行程): 6.40(.2520")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

www.shengfengdz.com



chinapogopinsupplier.com

公司简介

1. 专业生产24针探针
2. 专业生产各种规格探针OEM 服务
3. 专业生产各种规格探针
4. 专业生产各种规格探针

产品

PCB ICT FCT 各种规格探针 (各种)

各种规格探针 2 各种规格探针 (各种)

BGA 各种规格探针

各种规格探针 QZ VZ LM

