


規格書


品名	SFENG
品番	SF-P100-G0.9
材質	鋼
寸法	鋼
色	SUS
重量	200g
寸法	6.40(0.2520)
寸法	3A
寸法	W
寸法	2.54(0.1000)
寸法	1.70(0.0670)/1.75(0.0689)
MOQ	100
備考	7

規格書

SF-P100

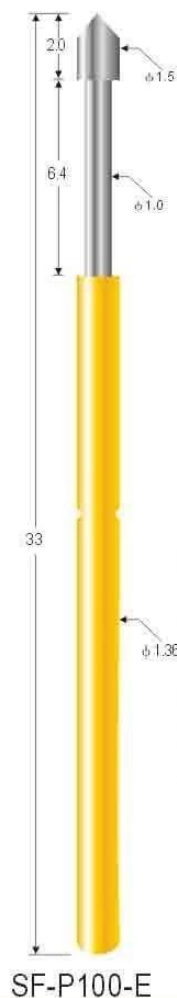

SF-P100-E

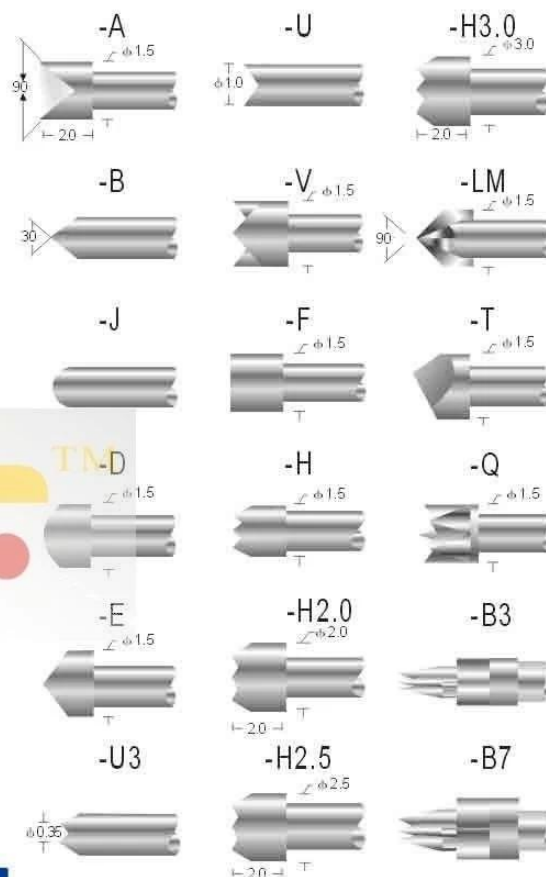

Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000 ")
- Mounting hole size(钻孔尺寸):
压克力: 1.70mm(.0670 ")
电木板、玻璃纤维板: 1.75mm(.0689 ")
- Full travel(行程): 6.40(.2520 ")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

www.shengfengdz.com

□□□□□□



□□□□□□

- 1. 24
- 2. OEM
- 3.
- 4.

PCB|ICT|FCT ()

() 2

BGA

QZVZLM

;

;

30# OK POM

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□□

