


□□□□

□□□□	SFENG
□□□□	SF-P11
□□□□□□	□□
□□□	□□
□	SUS□□□□□□□□
□□□□□□	150□□□□
□□□□	4.0□0.1575 "□
□□□□□	□3□a□
□□□□□	50□□□□W
□□□	1.90□0.0748 "□
□□□□□□	1.35□0.532 "□/ 1.40□0.0551 "□
MOQ	100 □
□□□□□□	7 □□□□□□□□□□□□

□□□□□

# SF-P11

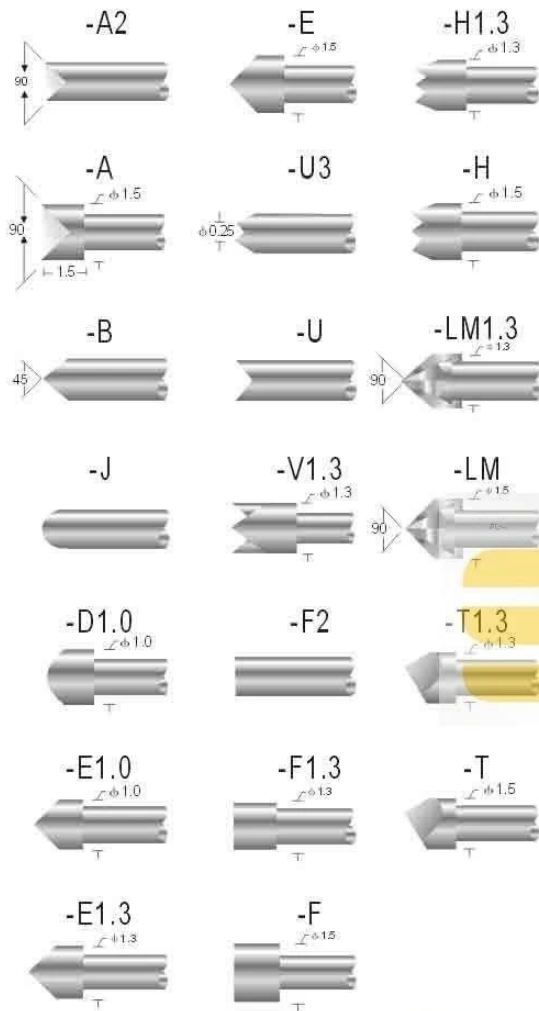

SP-P11-E

## Probe specifications SF-P11(技术规格)

- Recommended minimum center(最小间距): 1.90mm(.0748")
- Mounting hole size(钻孔尺寸):  
 压克力: 1.35mm(.0532")  
 电木板、玻璃纤维板: 1.40mm(.0551")
- Full travel(行程): 4.0(.1575")
- Spring force(弹簧压力): 150g
- Materials and finishes(材料及涂饰):  
 Plunger: Be Cu, Rh plated  
 Barrel: Brass, Gold plated  
 Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

[www.shengfengdz.com](http://www.shengfengdz.com)



chinapogopinsupplier.com

### 公司简介

1. 专业生产各种规格探针 24 小时服务热线
2. 提供 OEM 定制服务
3. 产品广泛应用于 PCB、ICT、FCT 测试
4. 拥有完善的质量管理体系

### 产品

PCB、ICT、FCT 测试探针

提供 24 小时服务热线 & 邮箱; 产品广泛应用于 PCB

BGA 测试探针






□□□□□□□□□□QZ□VZ□□□□□LM□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□;

□□□□□&□038;□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□30□OK□□□□□□□□□□□□□□□□□□□□□□□□

□□□□

Spring exhausted tester	DC power supply	Current resistance tester
 A tall, white, rectangular machine with a glass door on the front, likely used for testing spring fatigue or exhaustion.	 A white, boxy device with a black front panel. It features several knobs, switches, and output terminals. The brand name 'YoRi' is visible on the top left.	 A white, rectangular device with a large digital display showing '8.8.8.8'. It has a 'HIGH PRESS' warning symbol and a control knob on the right side.
Microscope	Tensile strength tester	Spring tester
 A white and black compound microscope with a stage, objective lenses, and an eyepiece.	 A vertical testing machine with a blue base and a silver upper column, used for measuring the tensile strength of materials.	 A white, compact testing device with a digital display and a control panel, used for testing springs.

□□□□□□□□

