





胜峰探针
SFENG
The China's The World's



chinapogopinsupplier.com

SF-P125

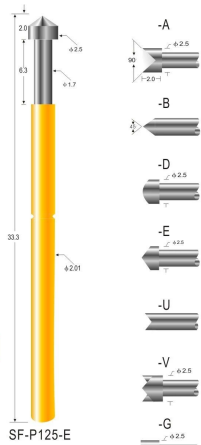
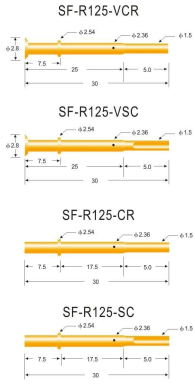


Probe specifications SF-P125(技术规范)

- Recommended minimum center(最小间距): 3.17mm(.1248")
- Mounting hole size(钻孔尺寸): 压克力: 2.40mm(.0945") 电木板、玻璃纤维板: 2.45mm(.0965")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰): Plunger: Be, Cu, Rh plated; Barrel: Brass, Gold plated; Spring: Stainless steel
- Current ration(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式): Crimp: R125-VCR, R125-CR; Solder cup: R125-VSC, R125-SC

Noted: Specifications subject to change without notice注: 规格变动不另行通知

SF-P156

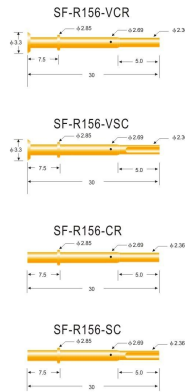

Probe specifications SF-P156(技术规范)

- Recommended minimum center(最小间距): 4.75mm(.1870")
- Mounting hole size(钻孔尺寸): 压克力: 2.75mm(.1083") 电木板、玻璃纤维板: 2.90mm(.1102")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 250g
- Materials and finishes(材料及涂饰): Plunger: Be, Cu, Rh plated; Barrel: Brass, Gold plated; Spring: Stainless steel
- Current ration(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式): Crimp: R156-VCR, R156-CR; Solder cup: R156-VSC, R156-SC

Noted: Specifications subject to change without notice注: 规格变动不另行通知



1. 24

OEM

3.

4.



PCB ICT FCT

2. &

BGA;

QZ VZ LM

;

&/

30 OK POM

□□□□



□□□□□□□□

